



LED STREET LIGHT

PRODUCT INFORMATION



Place of Origin: Guangdong, China

Application: ROAD

CCT: 3000-6000K (Daylight Alert)

IP: IP65

Beam Angle: 70°140°

CRI (Ra>) : 80

Input Voltage (V) : AC220V (±10%)

Lamp Luminous Efficiency(lm/w) : 120

Lamp Luminous Flux: 6000 (lm)

Warranty (Year) : 3Year

Working Temperature (C) : -25~60

Certification: RoHS, CE

Lifespan : 50000h

Working Time: 50000h

Product Weight: 3.3 (kg)

Power: 30W-150W

Light source: LED

Material: Die Casting Aluminum Housing


CCT: 3000-6000K

Input Voltage: AC85-265V

Lighting solutions service:

Lighting and circuitry design, DIALux evo layout, auto CAD layout, Project Installation

SECTIONAL VIEW

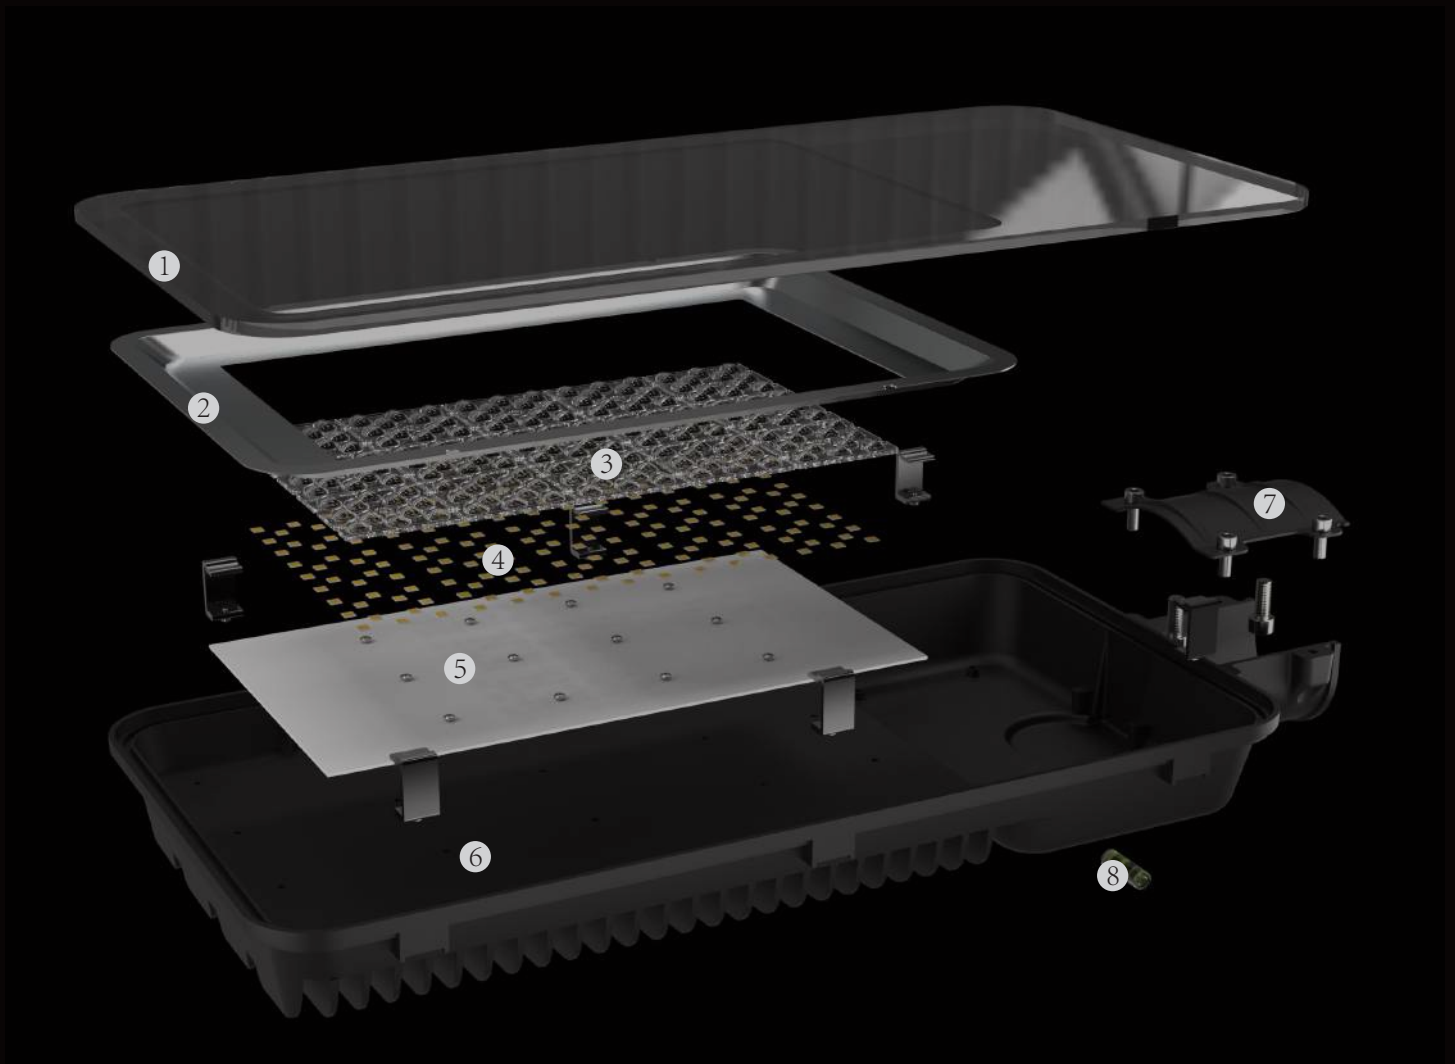

- 1. Glass panel
- 2. Concave aluminum plate
- 3. LED lens
- 4. SMD chip
- 5. PCB
- 6. Die-cast aluminum lamp body
- 7. Bracket
- 8. level





HIGH QUALITY TEMPERED GLASS

Thickness>2mm; uniform illumination.



UNIQUE DESIGN LED LENS

High light efficiency, low energy consumption;
High cost performance.



ALUMINUM HOUSING




Good heat dissipation performance;
Anti-corrosion, high temperature and cold resistance.



DIE-CASTING ALUMINUM HOLDER

Stronger holder; Fixing with Q304 screws.

LIGHT DISTRIBUTION

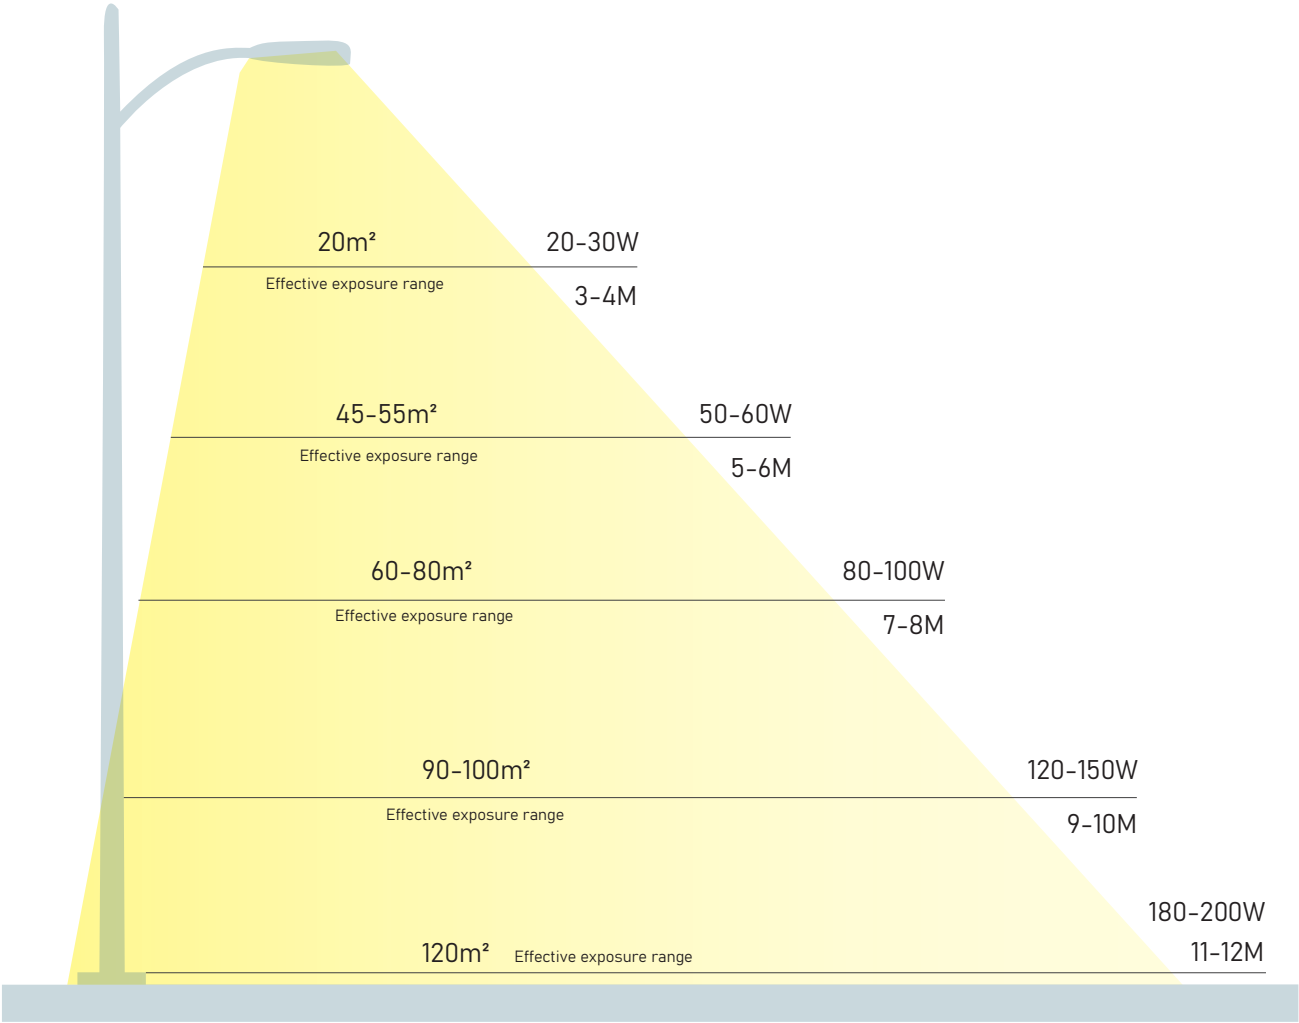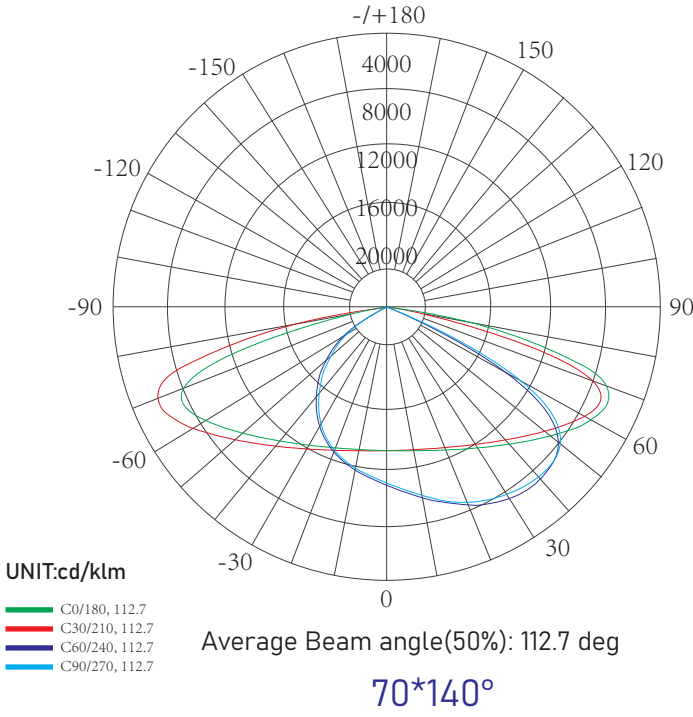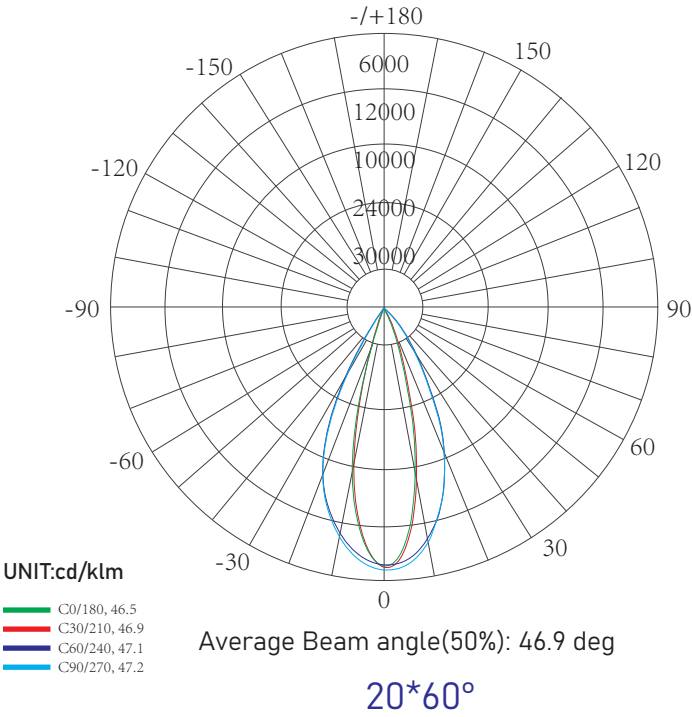



PRODUCT PARAMETERS

POWER	WORKING VOLTAGE	COLOR TEMPERATURE	PROTECTION GRADE	LAMP SIZE	PACKAGE SIZE	WEIGHT
30/40W	AC85-265V	2700-7000K	IP65	450*200*60mm	460*210*95mm	2.5KG
50/60W	AC85-265V	2700-7000K	IP65	500*210*60mm	510*220*95mm	3.3KG
80/90W	AC85-265V	2700-7000K	IP65	520*220*60mm	530*230*95mm	4.0KG
100-150W	AC85-265V	2700-7000K	IP65	600*255*65mm	620*280*110mm	5.5KG







LED STREET LIGHT