





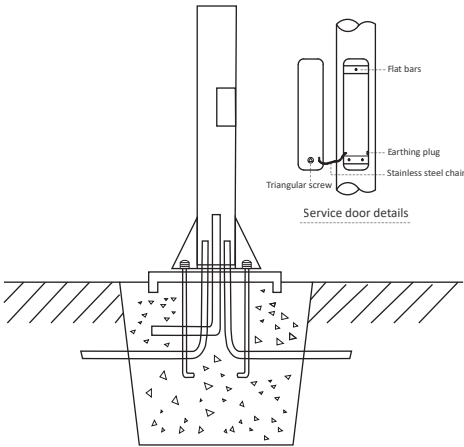

Access door & grounding

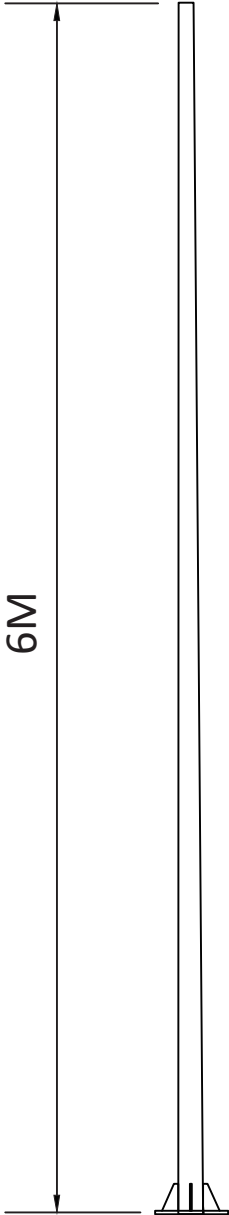

Hot dipped galvanized effect


Product Advantages

- ① Carbon steel Q235B/Q345 ★★★★★
- ② Anti corrosion aging ★★★★★
- ③ Anti typhoon & rainstorm ★★★★★


Trade Standard

CQC/CCC/CE/ROHS ★★★★★

The welding meets the requirements of international GB/T3323-2005 standard GB2694-2003 standard, light pole anti-corrosion life is more than 20 years. The adhesion reaches GB9286-1998.



- *Painting thickness 60-70μm
- *Dipped galvanized thickness >85μm
- *Steel thickness 2.0-2.5mm

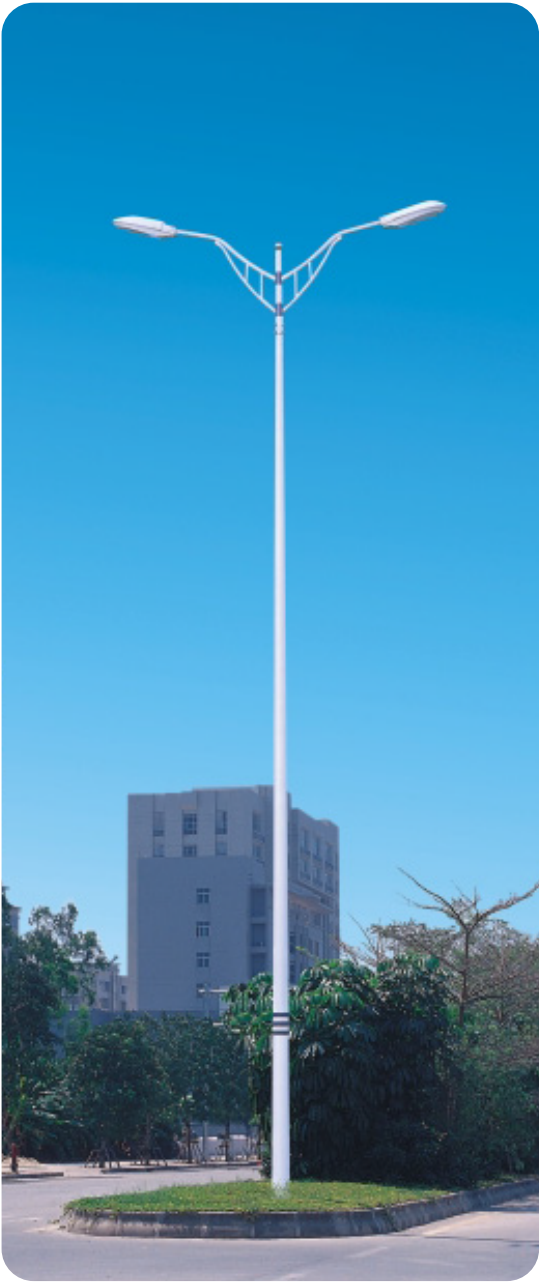

Name	Pole type	Anti-corrosion treatment	Height	Upper size	Base size	Thickness	Fange size	Foundation
2.5M lamp post	A	hot dipped galvanized + powder coating	2.5M	/	/	/	/	/
	B			76*2.0*2000mm	114*2.0*600mm	2.0	230*230*8mm	exploding screws
3M lamp post	A	hot dipped galvanized + powder coating	3.0M	φ60	φ100	2.0	230*230*8mm	4-M14*H400mm
	B			76*2.0*2000mm	114*2.0*600mm	2.5	230*230*8mm	4-M14*H400mm

*pole typ:ABCDE