



LED STREET LIGHT

LED路灯

产品信息/PRODUCT INFORMATION



原产地/Place of Origin: 中国广东省/Guangdong, China

应用案例/Application: 道路/ROAD

色温 (CCT) : 3000-6000K (日亮夜灭/Daylight Alert)

光源/Light source: SMD

光束角度/Beam Angle: 60°120°

显色指数/CRI (Ra>) : 80

输入电压/Input Voltage (V) : AC85-265V

灯具发光效率/Lamp Luminous Efficiency(lm/w) : 120

灯光通量 (lm) /Lamp Luminous Flux: 7500

材料/Material: Aluminum

工作温度/Working Temperature (C) : -25~60

认证/Certification: RoHS, CE

寿命 (小时) /Lifespan : 50000h

工作时间 (小时) /Working Time: 50000h

产品重量 (kg) /Product Weight: 5

功率/Power: 50W-200W

光源/Light source: COB

IP等级: IP65防护等级

灯体材料/Lamp Body Material: 铝合金/Alumimum Alloy

保修期/Warranty (年/Year) : 3年/Year

照明解决方案服务/Lighting solutions service:

照明和电路设计、DIALux evo布局、自动CAD布局、项目安装/

Lighting and circuitry design, DIALux evo layout, auto CAD layout, Project Installation

剖视图/SECTIONAL VIEW



- 1.LED固定边框/Led fixed frame
- 2.钢化玻璃面罩/Tempered glass mask
- 3.防水胶圈/Waterproof rubber ring
- 4.SMD芯片/SMD chip
- 5.铝壳/Aluminum shell



Rainproof and dustproof



Energy saving



High brightness



Low light attenuation



Long life



COB/SMD CHIPS ARE AVAILABLE

COB/SMD可用


Using optical tempered glass,
which not easy break and uniform brightness.
采用光学钢化玻璃，不易破碎，亮度均匀。



ALUMINUM HOUSING

铝外壳

Good heat dissipation performance;
Anti-corrosion, high temperature and cold resistance.
散热性能好；防腐、耐高温、耐寒。

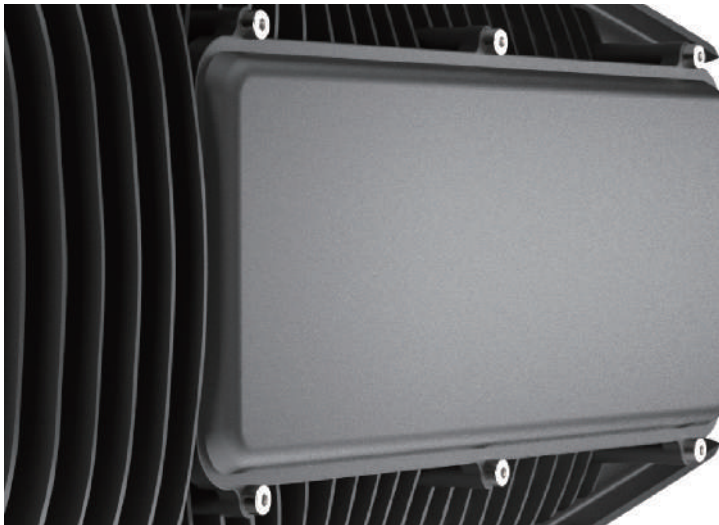

HIGH QUALITY DRIVER

高品质驱动器

Various brands of driver are available;
With surge protection; Lifespan>5 years.
可提供各种品牌的驱动器；带浪涌保护；寿命>5年。




STANDARD LIGHT POLE INTERFACE

标准灯杆接口



Use stainless steel screws, no rust,
good stability and beautiful appearance.
采用不锈钢螺丝，无锈蚀，稳定性好，外观美观。

光线分布/LIGHT DISTRIBUTION

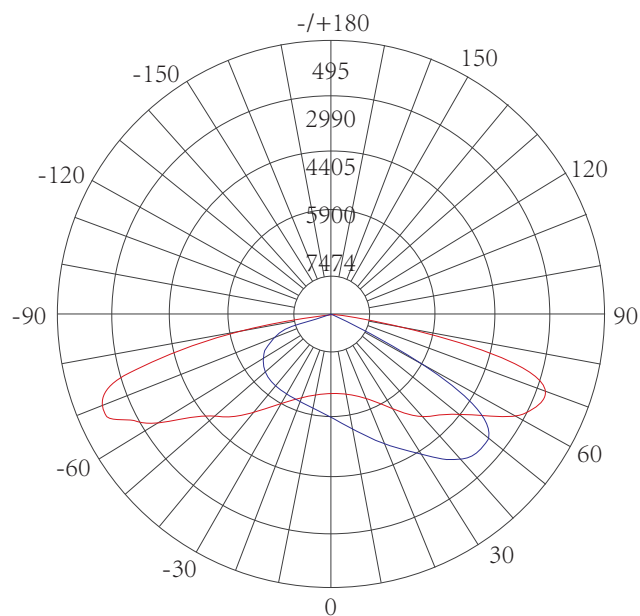


Average Beam angle(50%): CO-180,C90-270; 139.9 deg, 46.9 deg

CO-180 — C90-270

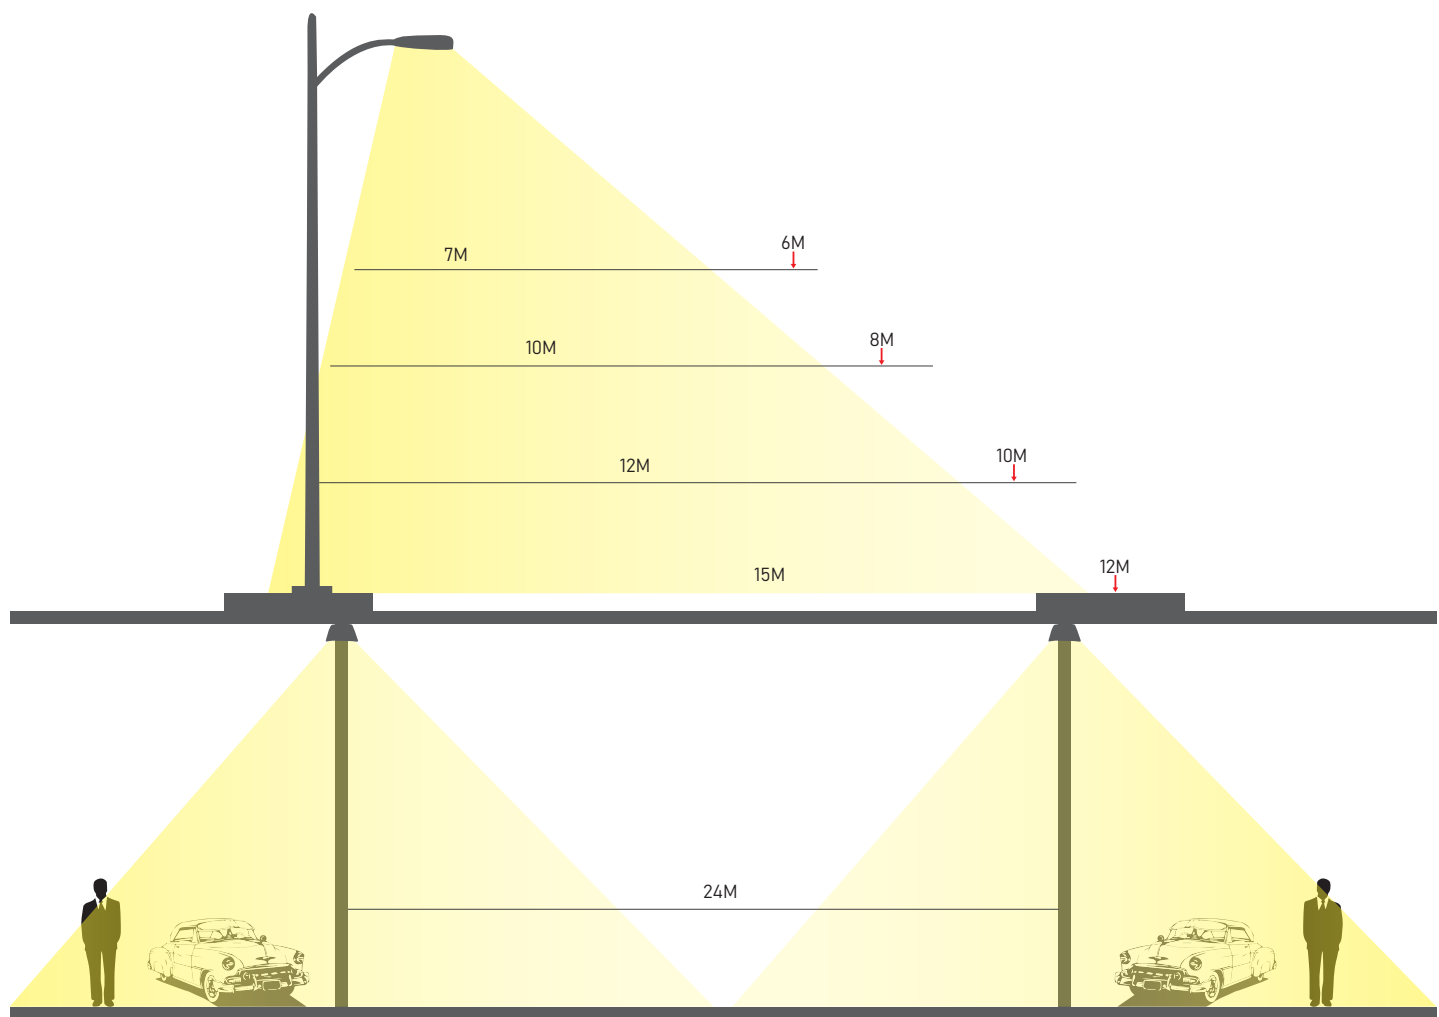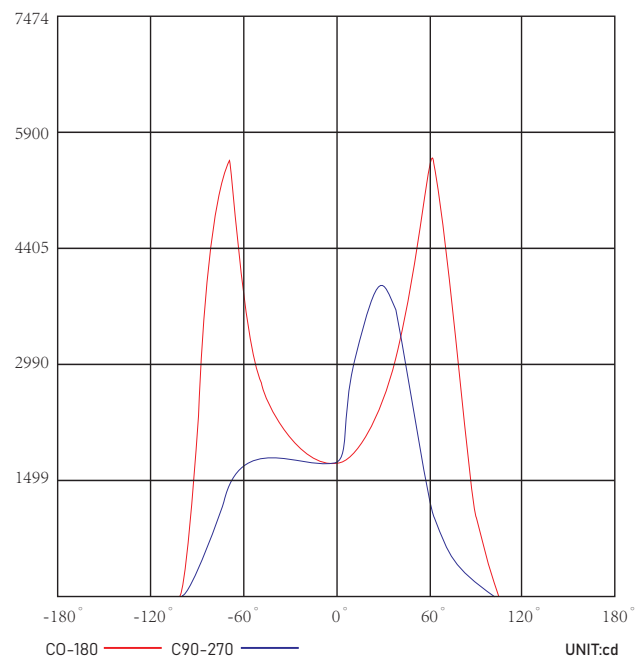

产品参数/PRODUCT PARAMETERS

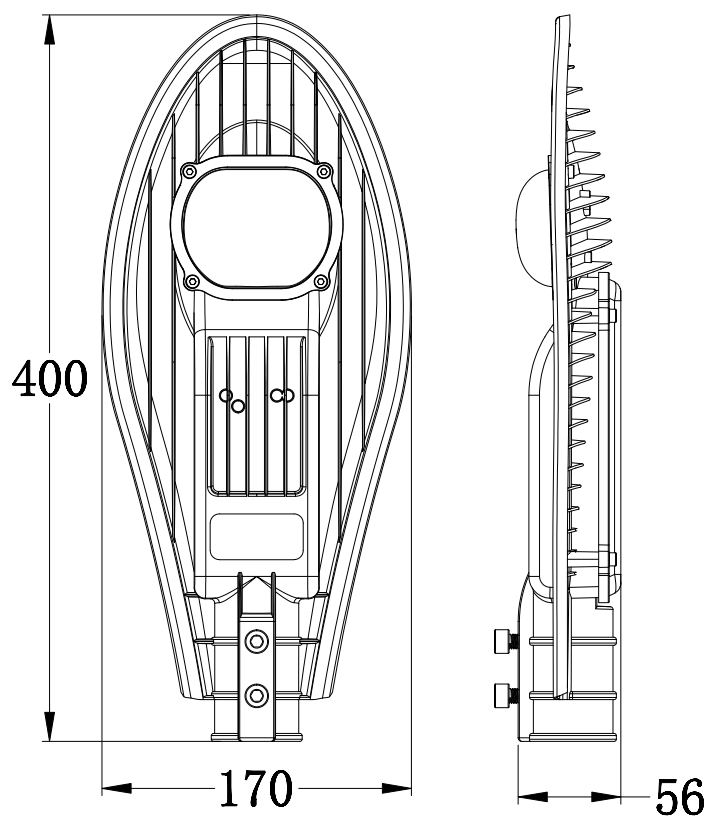


Ukuran : mm

功率 Power	发光效率 Luminous	LED芯片 LED Chip	色温 Color temperature	显色 Ra	工作温度 Working temperature
30W	100-130lm/W	SMD3030/COB	3000-6000K	80	-40℃~50℃
驱动器 (Driver option)		工作电压 (Working voltage)		防护等级 (IP)	
PHILIPS/Inventronics/Meanwell		AC85-305		IP65	



产品参数/PRODUCT PARAMETERS

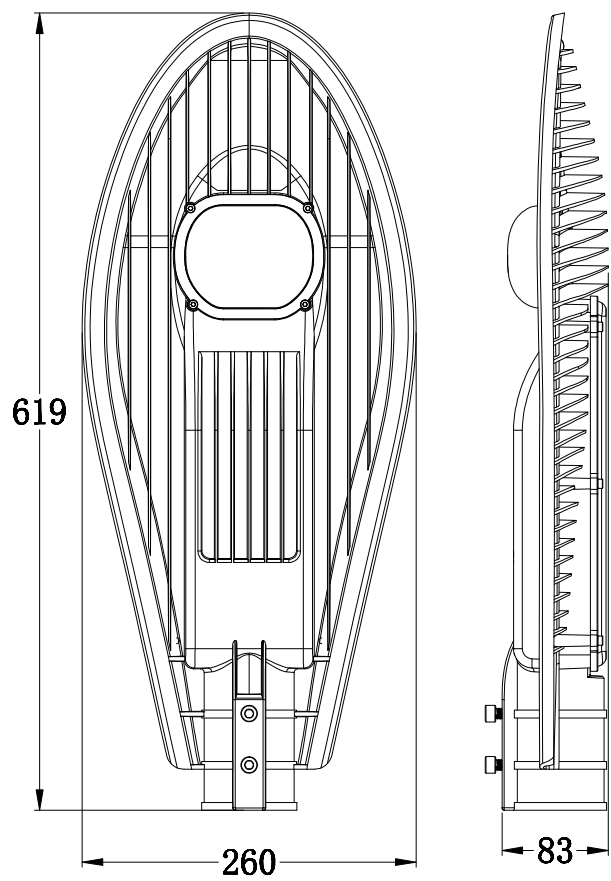


Ukuran : mm

功率 Power	发光效率 Luminous	LED芯片 LED Chip	色温 Color temperature	显色 Ra	工作温度 Working temperature
50W	100-130lm/W	SMD3030/COB	3000-6000K	80	-40℃~50℃
驱动器 (Driver option)		工作电压 (Working voltage)		防护等级 (IP)	
PHILIPS/Inventronics/Meanwell		AC85-305		IP65	



产品参数/PRODUCT PARAMETERS

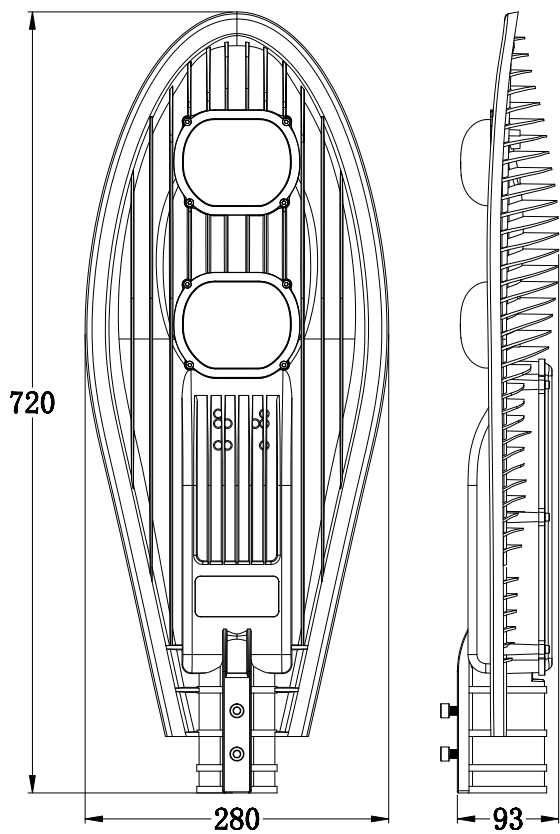


Ukuran : mm

功率 Power	发光效率 Luminous	LED芯片 LED Chip	色温 Color temperature	显色 Ra	工作温度 Working temperature
100W	100-130lm/W	SMD3030/COB	3000-6000K	80	-40℃~50℃
驱动器 (Driver option)		工作电压 (Working voltage)		防护等级 (IP)	
PHILIPS/Inventronics/Meanwell		AC85-305		IP65	




产品参数/PRODUCT PARAMETERS

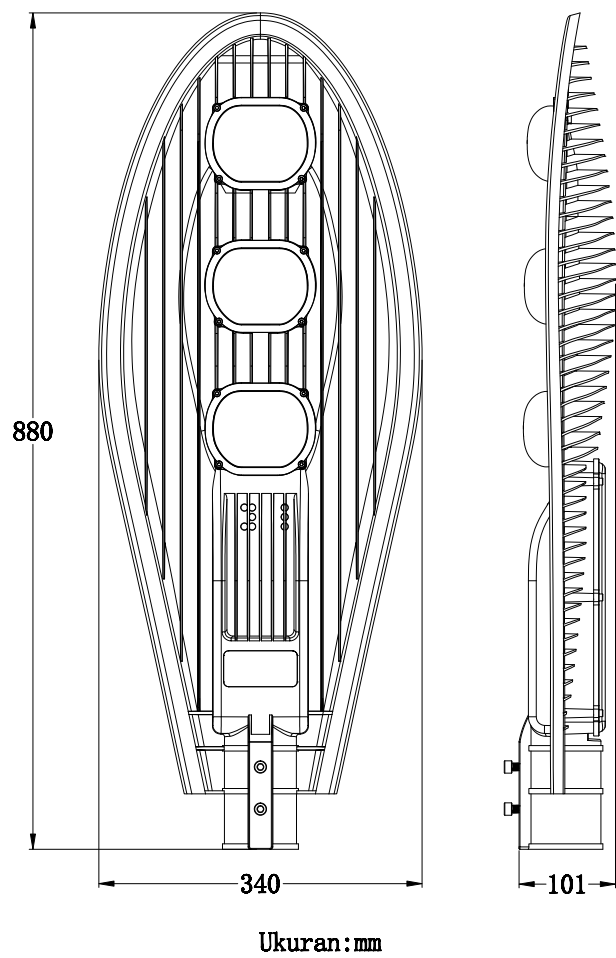

功率 Power	发光效率 Luminous	LED芯片 LED Chip	色温 Color temperature	显色 Ra	工作温度 Working temperature
150W	100-130lm/W	SMD3030/COB	3000-6000K	80	-40℃~50℃
驱动器 (Driver option)		工作电压 (Working voltage)		防护等级 (IP)	
PHILIPS/Inventronics/Meanwell		AC85-305		IP65	



产品参数/PRODUCT PARAMETERS

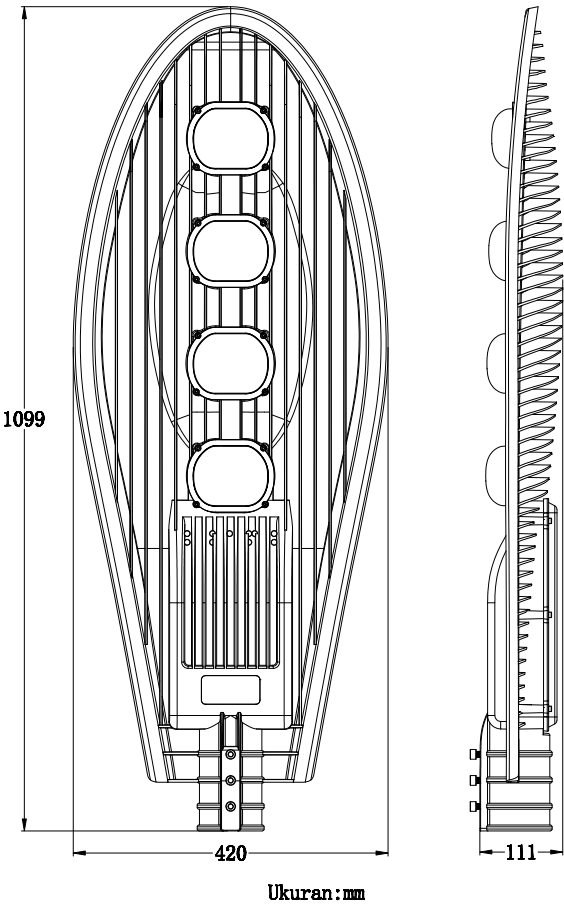


功率 Power	发光效率 Luminous	LED芯片 LED Chip	色温 Color temperature	显色 Ra	工作温度 Working temperature
200W	100-130lm/W	SMD3030/COB	3000-6000K	80	-40℃~50℃
驱动器 (Driver option)	工作电压 (Working voltage)			防护等级 (IP)	
PHILIPS/Inventronics/Meanwell	AC85-305			IP65	



案例/APPLICATION



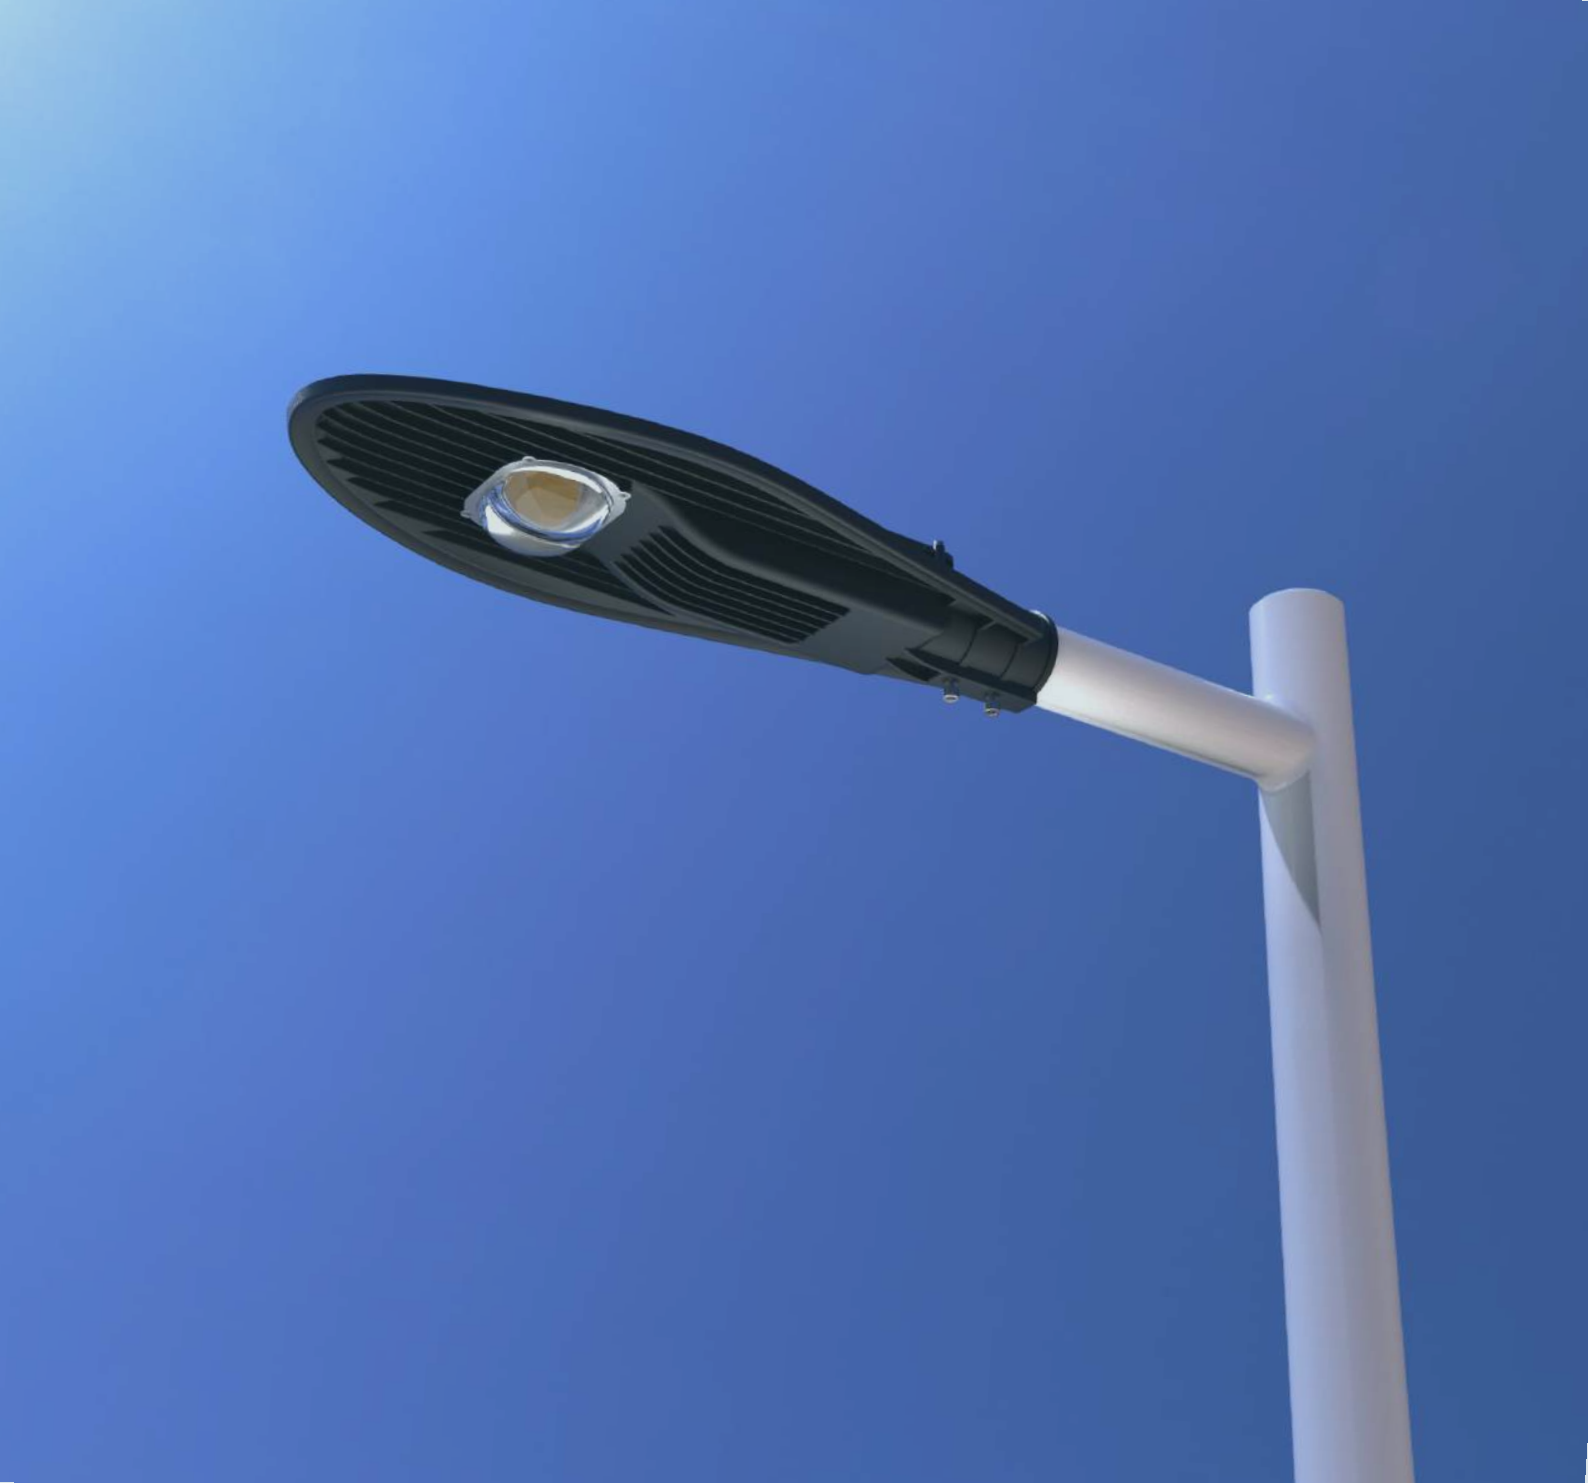

LED STREET LIGHT

LED路灯