

SPECIFICATION



Place of Origin: Guangdong, China

Application: Road, Park, Villa

CCT: 3000-6000K

Beam Angle: 70*140°

.KI (KU>) : 75

Input Voltage (V): AC220V $(\pm 10\%)$

uminous Efficiency((Im/w) : 120

Lamp Luminous Flux: 6000

Narranty (Year) : 3Year

Working Temperature ($^{\circ}$) : -25~60

Lifespan : 50000h

Working Time: 50000h

Power: 30W-60W

Liaht source: LEI

Material: Die Casting aluminium


CCT: 3000-6000K

out Voltage: AC85-265V

Certification: RoHS, CE

Liahtina and circuitry desian. DIALux evo lavout.

auto CAD layout, Project Installation

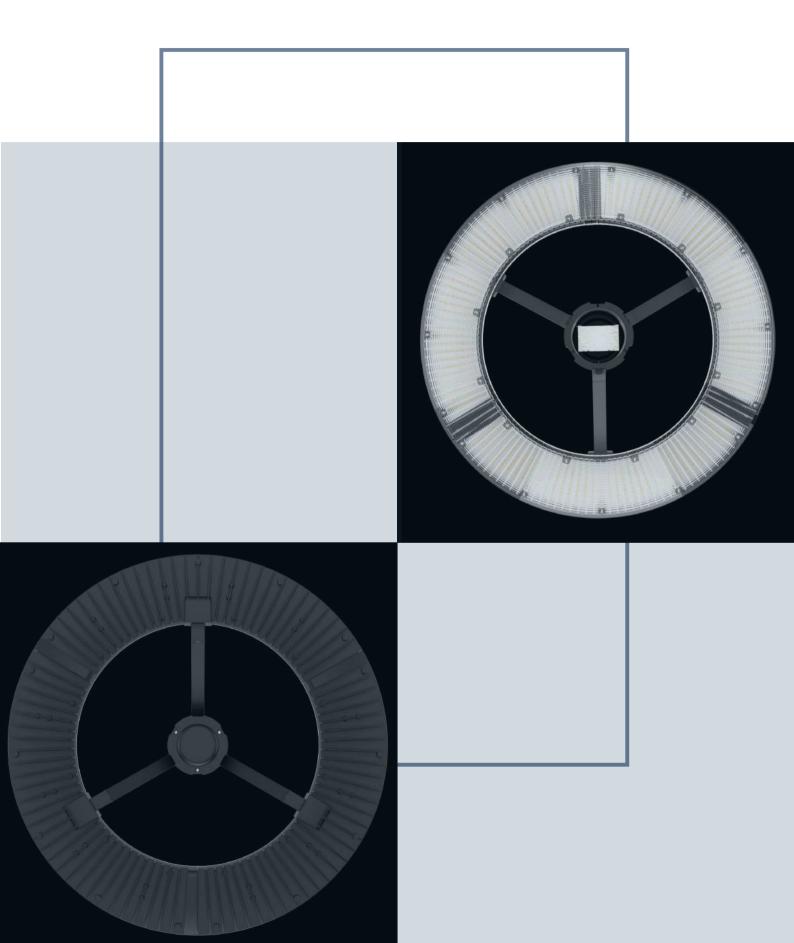

CUSTOMIZED OPTICAL LENS

Professional lens design, strong light penetration; Improve light efficiency effectively.




ULTRA BRIGHT LED CHIP

CREE/BRIDGELUX/PHILIPS chips available; Luminous efficiency 160lm/w.



DIE- CASTING ALUMINUM HOUSING

It is made of die-casting aluminum, with strong corrosion resistance, IKO8 for anti-impact.

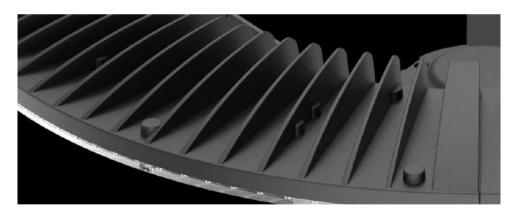



UNIVERSAL LIGHT POLE

Installation on poles with \emptyset 78. Pole-top installation on poles with \emptyset 78 and \emptyset 120 mm terminals.



Luminous intensity distribution:

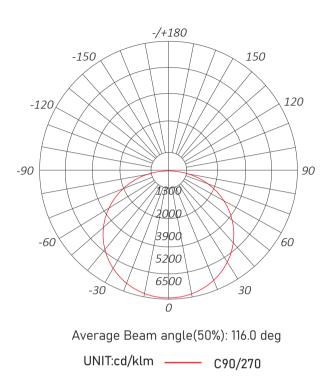


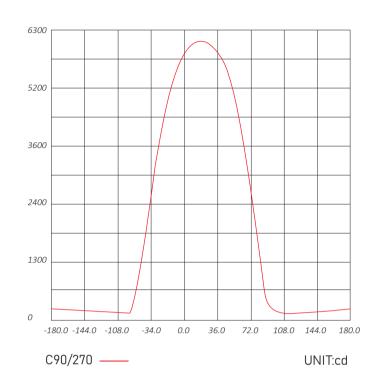

Optional color:




Product size:

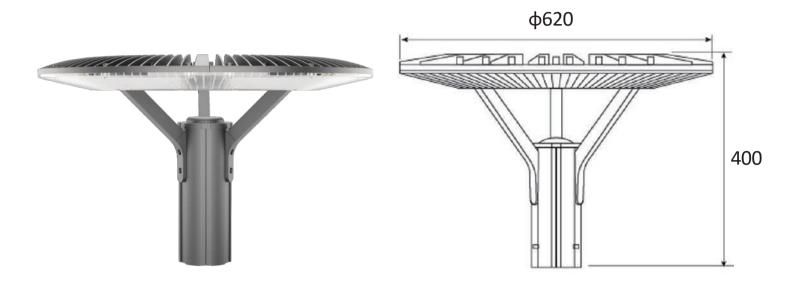

Pole mounting

- 1.Turn off the power before installation.
- 2. Wiring right in the wiring box("Black"is connected to "L", "White"connect to "N", "Green"to "Ground") and set the lamp into the bracket by the hole. (Picture 1).
- 3.We should fasten the eight screws with a hex wrench, and finished (Picture 2).

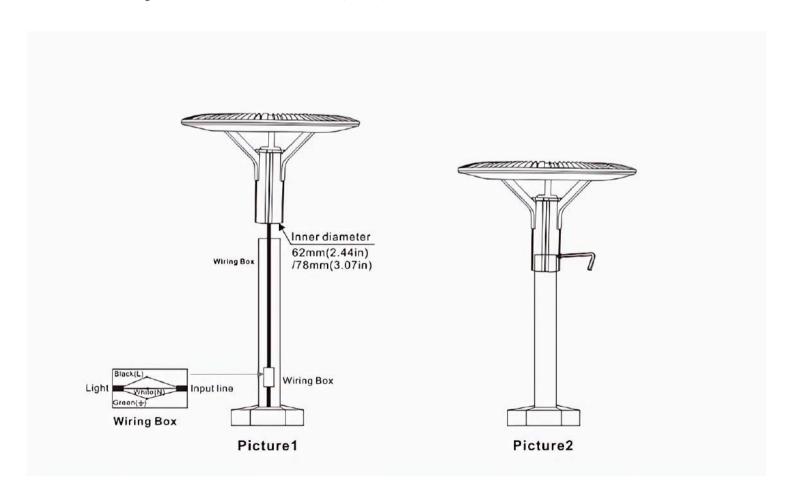







PRODUCT PARAMETERS

Model No	DLPL-GNL1015
Power	30-60W
Input Voltage	AC90-305Vac; 50/60Hz
PF	>0.95
Luminous efficacy	120-150LM/W
LED CHIPS	Lumileds/CREE/customize 3030/5050
Material	Die-casting Aluminium ADC12
CCT	2700-6500K
CRI	>75
Driver	Meanwell/Inventronics/DAWN
Lifespan	50, 000 H
IP rating	IP65

APPLICATION



