




MODERN GARDEN LIGHTS

现代庭园灯具

FEATURES

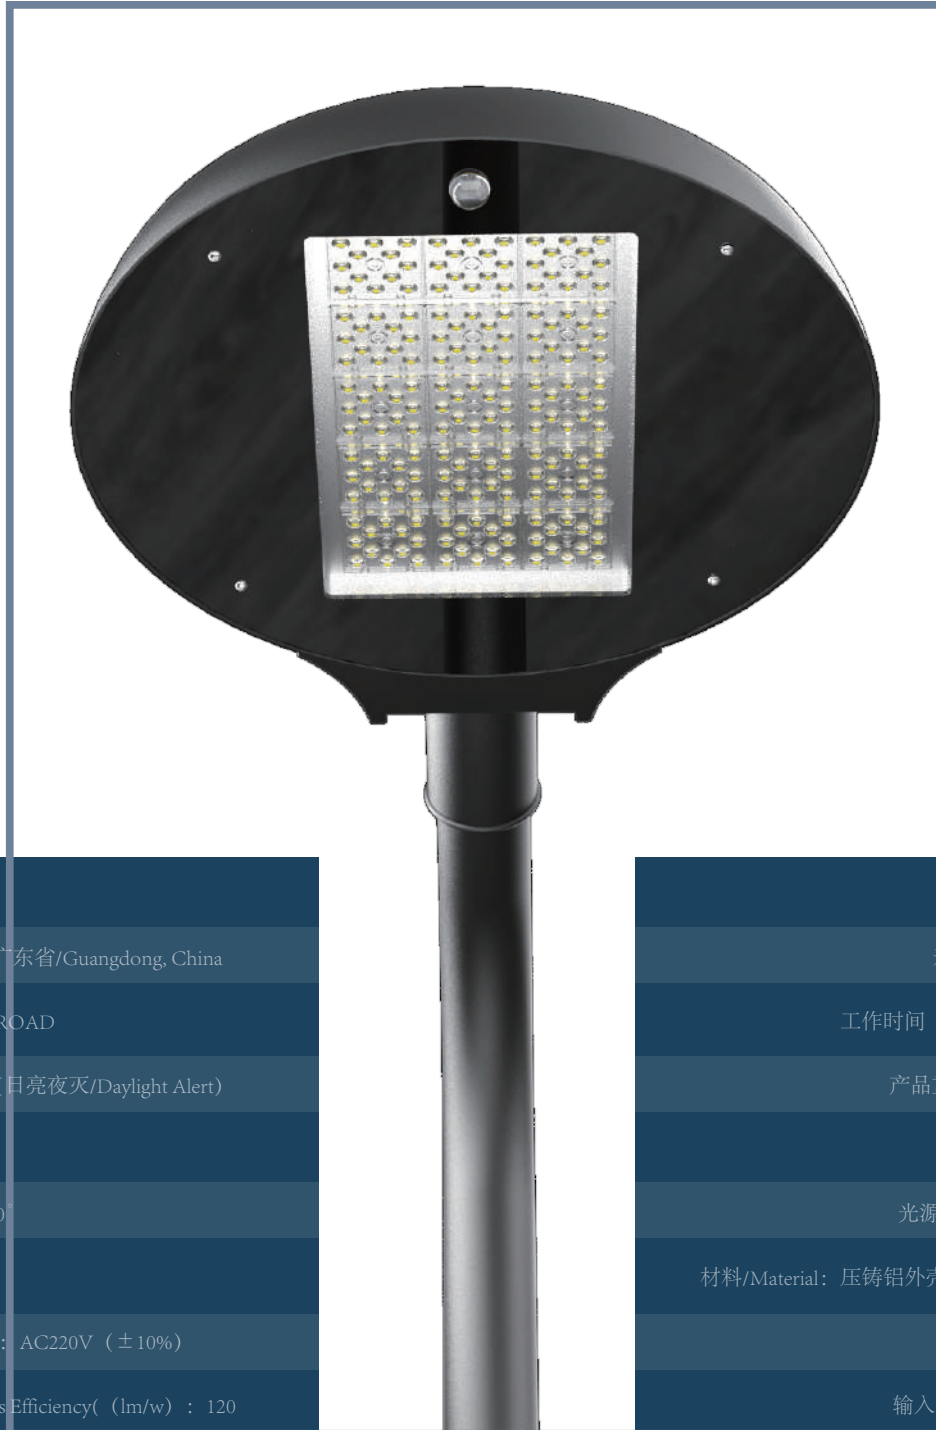

原产地/Place of Origin: 中国广东省/Guangdong, China

应用案例/Application: 道路/ROAD

色温 (CCT) : 3000-6000K (日亮夜灭/Daylight Alert)

IP等级: IP65防护等级

光束角度/Beam Angle: 70°*140°

显色指数/CRI (Ra>) : 80

输入电压/Input Voltage (V) : AC220V (±10%)

灯具发光效率/Lamp Luminous Efficiency(lm/w) : 120

灯光通量 (lm) /Lamp Luminous Flux: 6000

保修期/Warranty (年/Year) : 3年/Year

工作温度/Working Temperature (°C) : -25~60

认证/Certification: RoHS, CE

寿命 (小时) /Lifespan : 50000h

工作时间 (小时) /Working Time: 50000h

产品重量 (kg) /Product Weight: 3.3

功率/Power: 30W-150W

光源/Light source: 发光二极管/LED

材料/Material: 压铸铝外壳/Die Casting Aluminum Housing

CCT: 3000-6000K


输入电压/Input Voltage: AC85-265V

照明解决方案服务/Lighting solutions service:

照明和电路设计、DIALux evo布局、自动CAD布局、项目安装/


Lighting and circuitry design, DIALux evo layout,

auto CAD layout, Project Installation

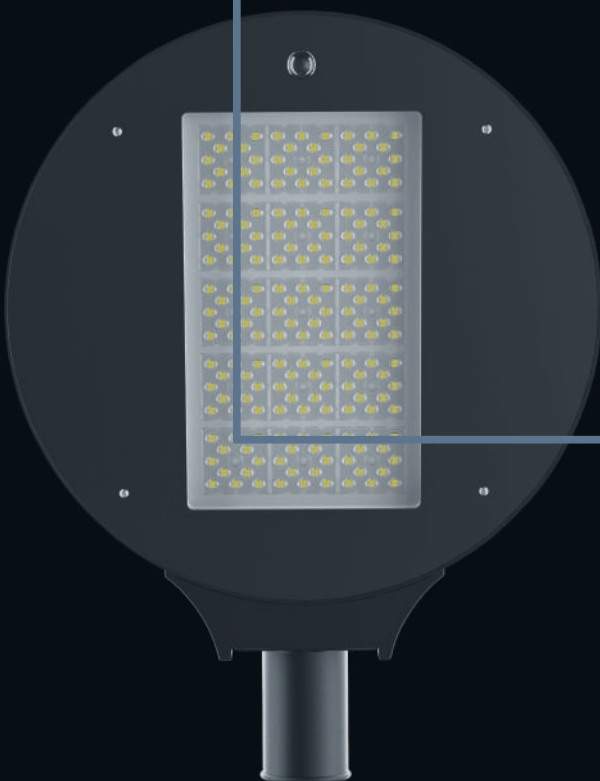

CUSTOMIZED OPTICAL LENS

定制光学镜片

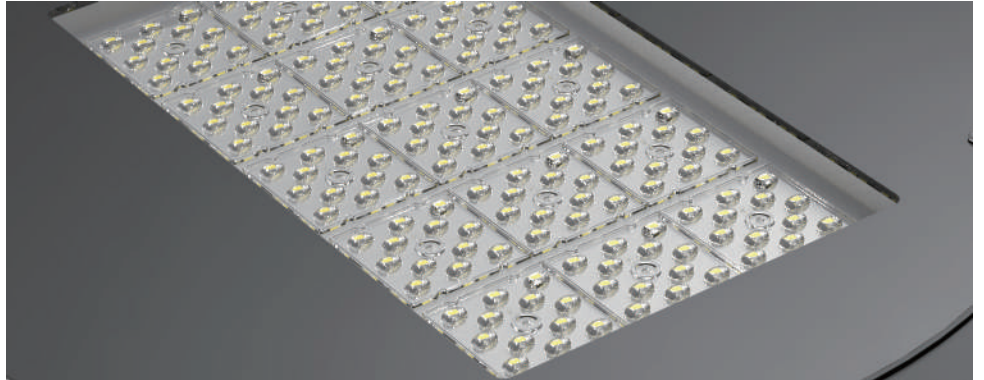

ULTRA BRIGHT LED CHIP

超亮 LED 芯片




DIE- CASTING ALUMINUM MATERIAL

压铸铝材质




UNIVERSAL LIGHT POLE

通用灯竿

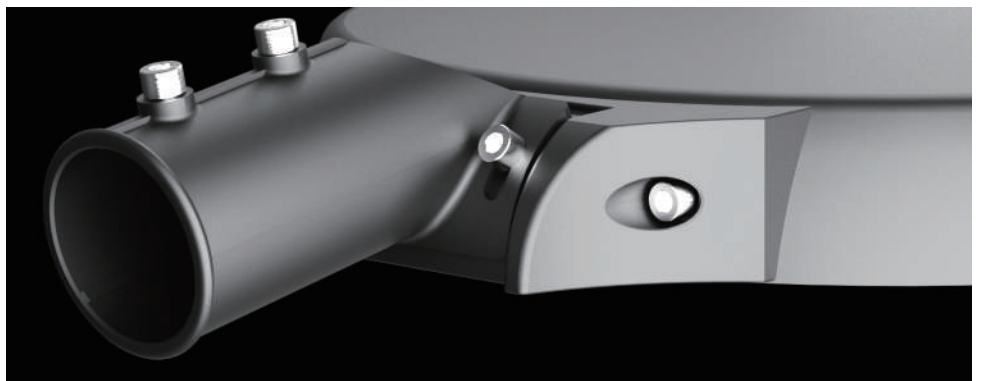


Luminous intensity distribution:

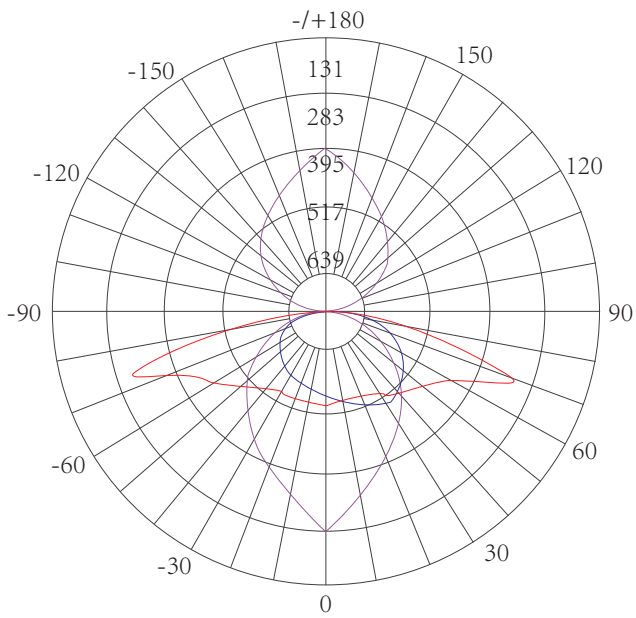

Average Beam angle(50%): 131.4 deg


UNIT:cd/klm — C0-180 — C90-270 — C74

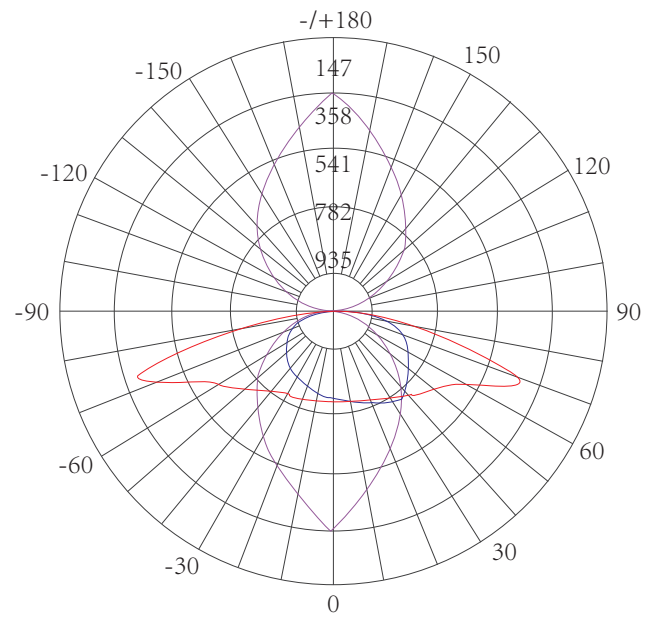

Average Beam angle(50%): 120.8 deg

UNIT:cd/klm — C0-180 — C90-270 — C70

Optional color:

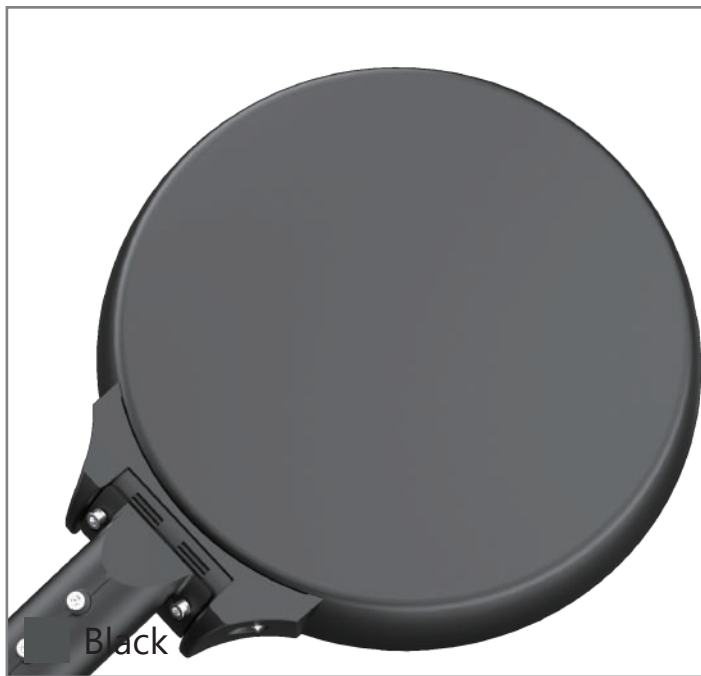

Black



Silver

Pole mounting 立杆安装

1. Turn off the power before installation.
2. Wiring right in the wiring box ("Black" is connected to "L", "White" connect to "N", "Green" to "Ground") and set the lamp into the bracket by the hole. (Picture1).
3. We should fasten the eight screws with a hex wrench, and finished (Picture2).

1. 安装前请关闭电源。

2. 在接线盒内接线（“黑”接“L”，“白”接“N”，“绿”接“地”），将灯头通过孔装进支架。（图1）。

3. 用内六角扳手拧紧八个螺丝，完成（图2）。

DETAILS



弯臂/Curved arm



平装/Flat pac



产品参数/PRODUCT PARAMETERS

功率	
工作电压	
色温	
防护等级	
灯具尺寸	
包装尺寸	
重量	





MODERN GARDEN LIGHTS

现代庭园灯具