








INNOVATION ELECTRICITY-FREE HIGH CHARGING EFFICIENCY



Product features:

- High brightness.
- High charging efficiency.




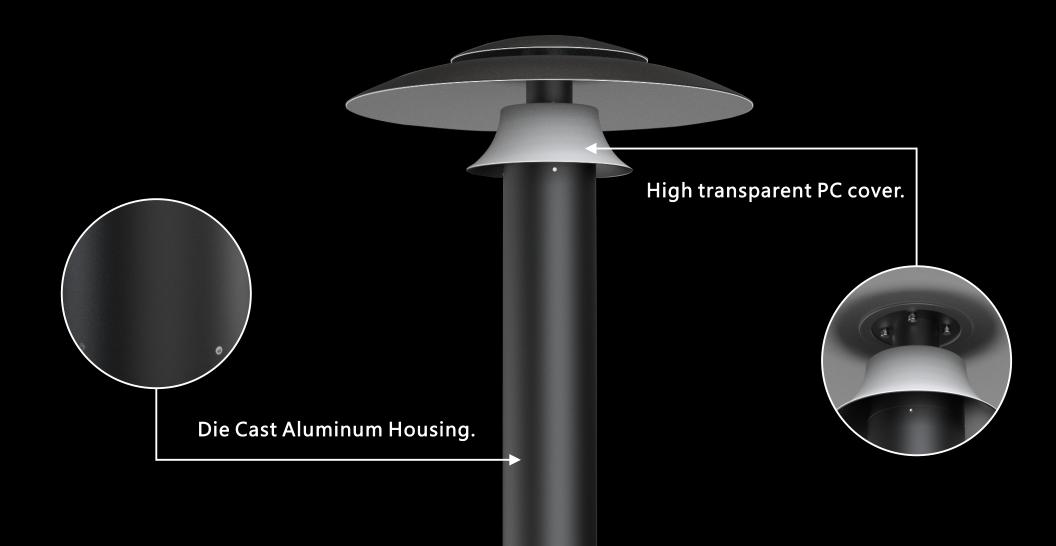




INDUSTRIAL STYLE:

Modern style, Die-cast aluminum material, fit different demand in application; High luminious efficiency LED modules has been applied here to intepretate our energy saving concept.

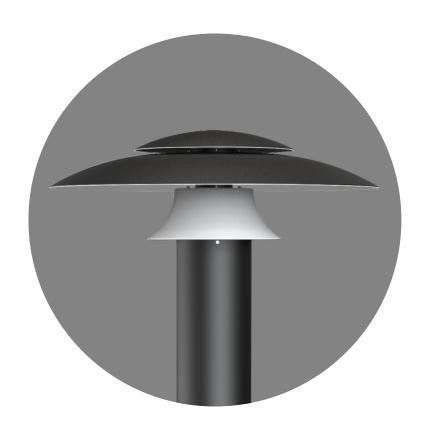





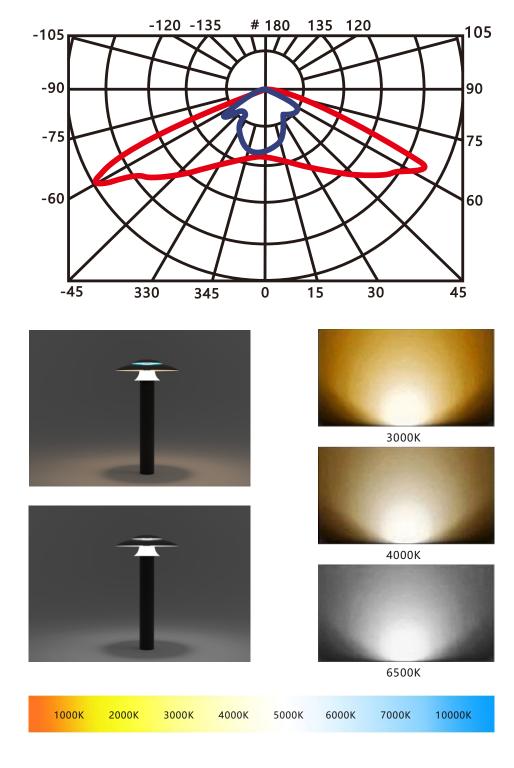






TECHNICAL DRAWINGS

Product Paramenters

Luminaire	Rated Power Light source LED chip Luminious efficiency Luminous flux. Color temperature CRI. Beam angle	15W x 3 LED SMD Lumileds / Bridgelux 160lm/w 40W-6400lm 2700-6500K >75 165 x 70 degree
Pole	Pole shape Material Total height Cross section size Flange size	Triangle straight Extruded aluminum profile 6061 4 meters (customization available) 318x318x318mm 550x550x550mm x T30mm
PV module	Photovoltaic type Power Other function	Polycrystalline / monocrystallince 300W Replaceable
Battery system	Battery type System voltage Battery capacity	Lithium iron phosphate battery 12.8V 48Ah

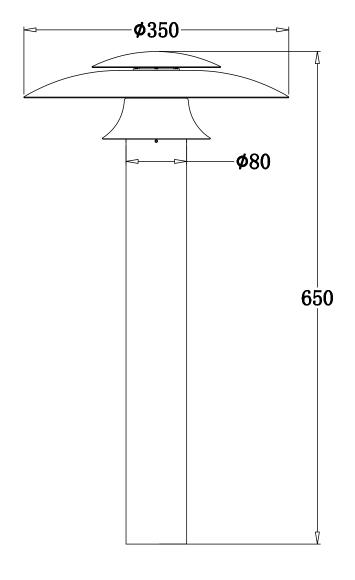











Shipment Packaging Tru

Truck loading Goods receipt



- **By Shipping LCL/Container** 15-30 days depending on destination
- By Carrier DHL/FED/UPS/ARMAX 3-7days depending on destination
- **By Air Shipping** 7-10 days depending on destination





LAWN LIGHT SERIES

A BETTERLIGHT A BETTERLIFE



ZHONGSHAN DAWN LIGHTING TECHNOLOGY CO.,LTD

Http://www.dawnlighting.net

Email: info@dawnlighting.net