


## LAWN LIGHT SERIES



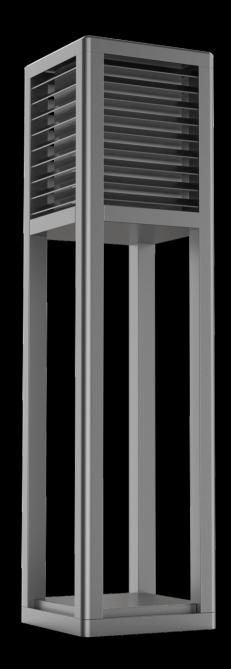


### **Product features:**

- High brightness.
- High charging efficiency.






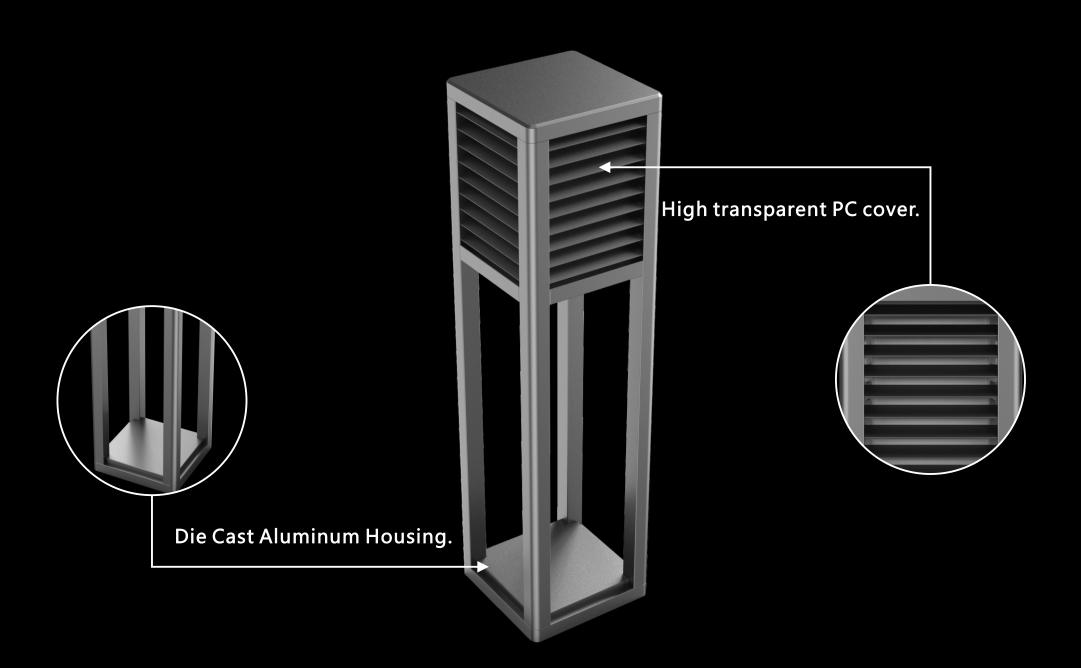




#### **INDUSTRIAL STYLE:**

Simple design, solid and hollow style, fit different demand in application; High luminious efficiency LED modules has been applied here to intepretate our energy saving concept.

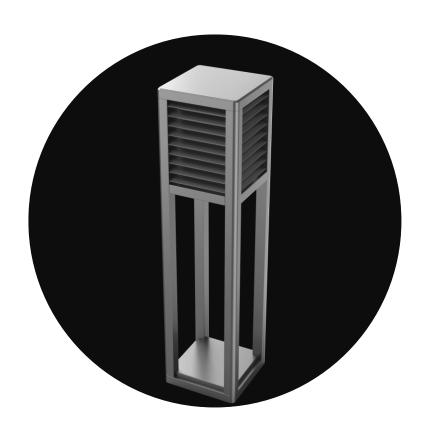





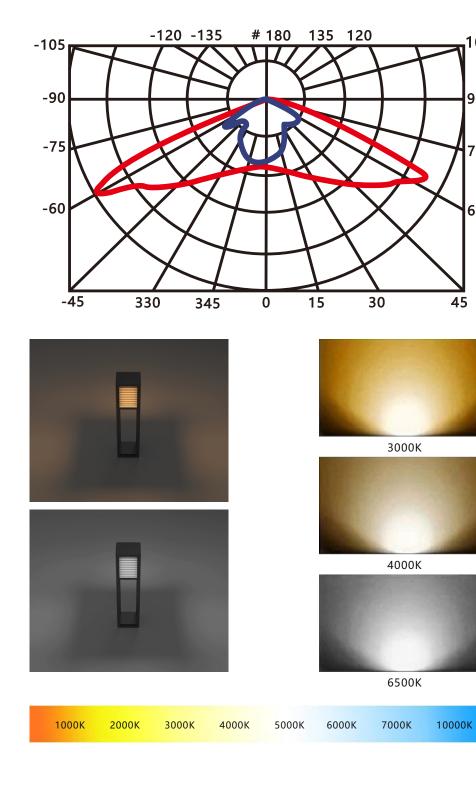




# TECHNICAL DRAWINGS

#### Product Paramenters

Luminaire	Rated Power Light source LED chip Luminious efficiency Luminous flux. Color temperature CRI. Beam angle	15W x 3 LED SMD Lumileds / Bridgelux 160lm/w 40W-6400lm 2700-6500K >75 165 x 70 degree
Pole	Pole shape Material Total height Cross section size Flange size	Triangle straight Extruded aluminum profile 6061 4 meters (customization available) 318x318x318mm 550x550x550mm x T30mm
PV module	Photovoltaic type Power Other function	Polycrystalline / monocrystallince 300W Replaceable
Battery system	Battery type  System voltage Battery capacity	Lithium iron phosphate battery 12.8V 48Ah

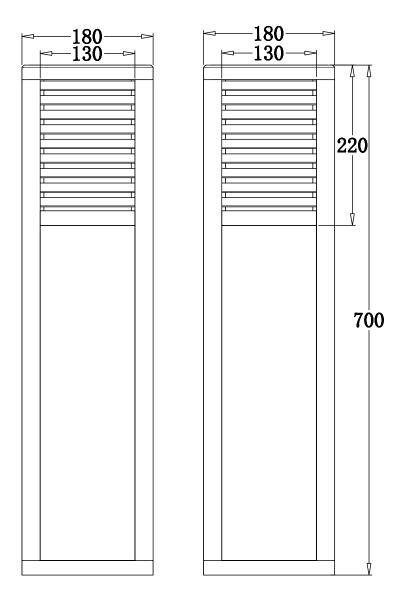











Shipment

Packaging

Truck loading Goods receipt



- By Shipping LCL/Container 15-30 days depending on destination
- By Carrier DHL/FED/UPS/ARMAX 3-7days depending on destination
- **By Air Shipping** 7-10 days depending on destination





# LAWN LIGHT SERIES

A BETTERLIGHT A BETTERLIFE

