


CHAPTER LIGHT SERIES


Patented product

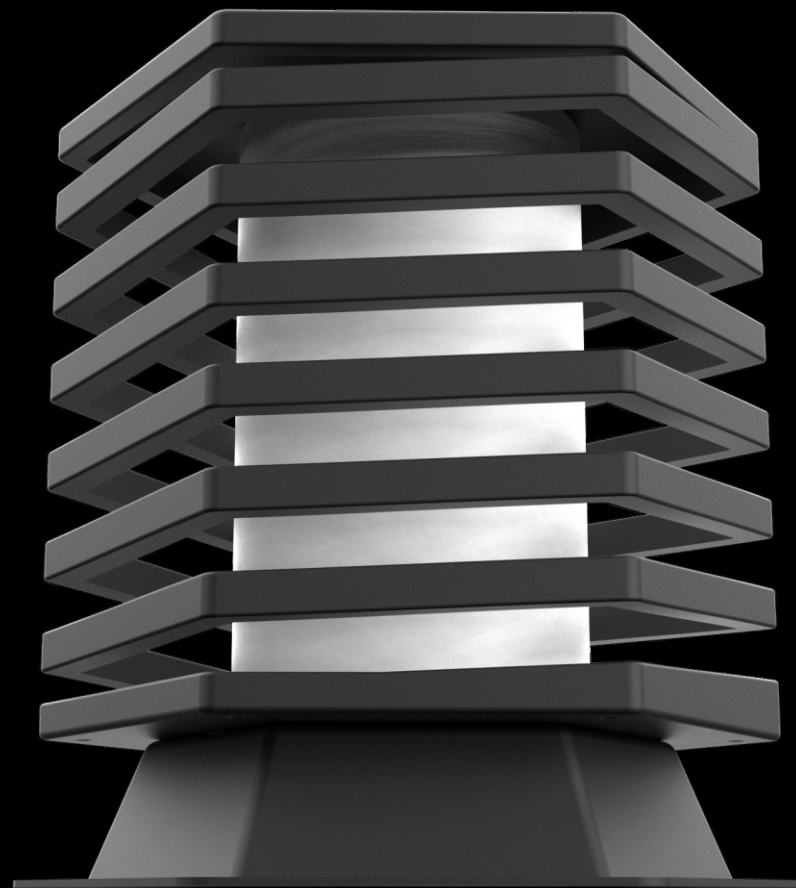

INNOVATION HIGH LUMINOUS EFFICIENCY



Product features:

- High brightness.
- High charging efficiency.

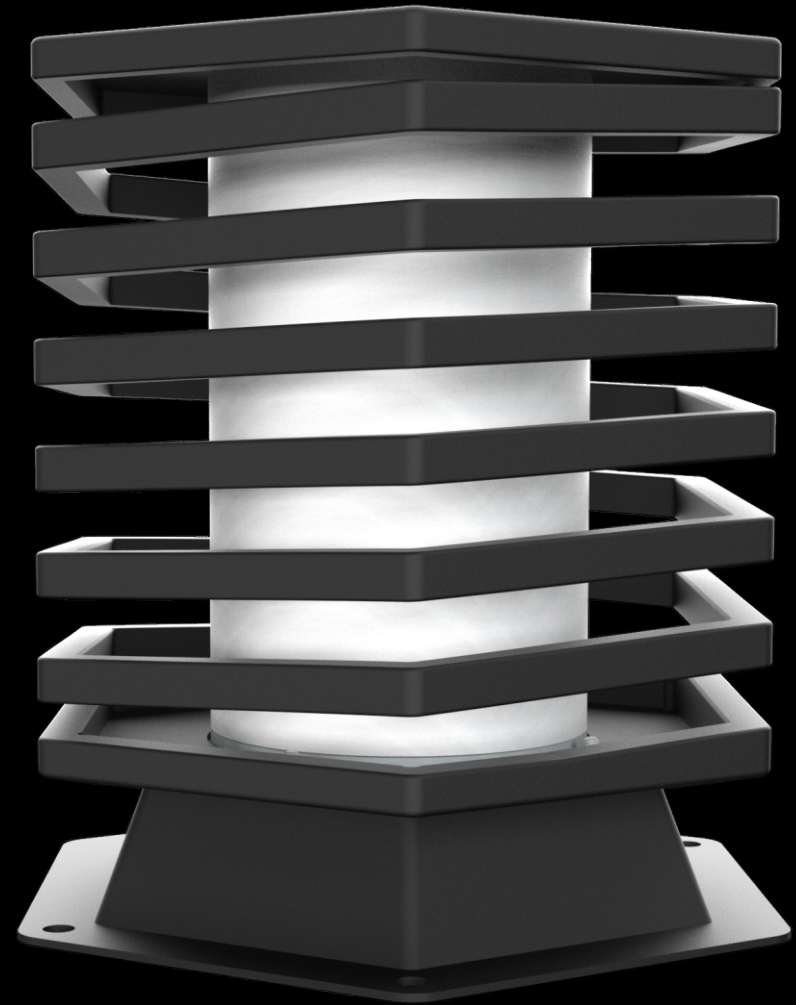


HIGH CHARGING EFFICIENCY


High efficiency monocrystalline cells;
Conversion rate reached 21%.

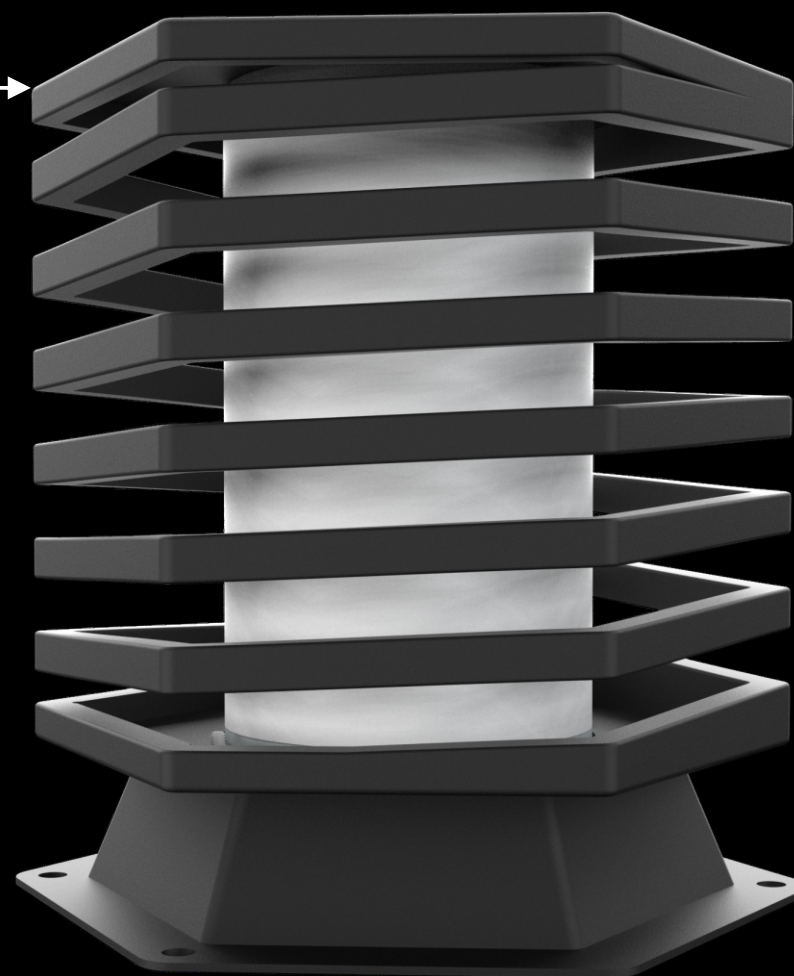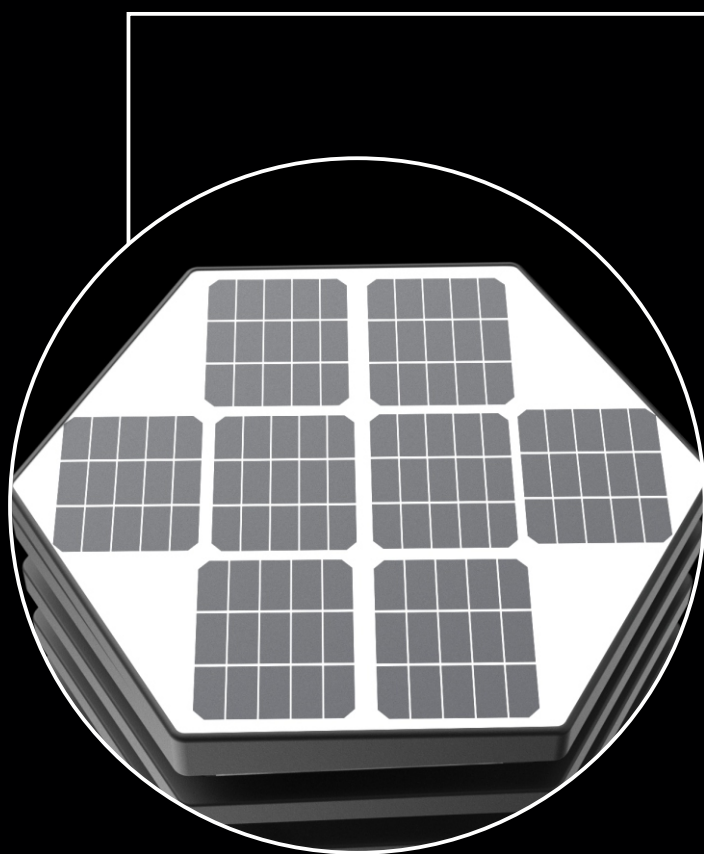


DESIGNED TO
LEAVE A MARK



Gracious style:
Unique design on the staggered
luminaire with advanced led technology
application, showing a different elegant
style in the city.

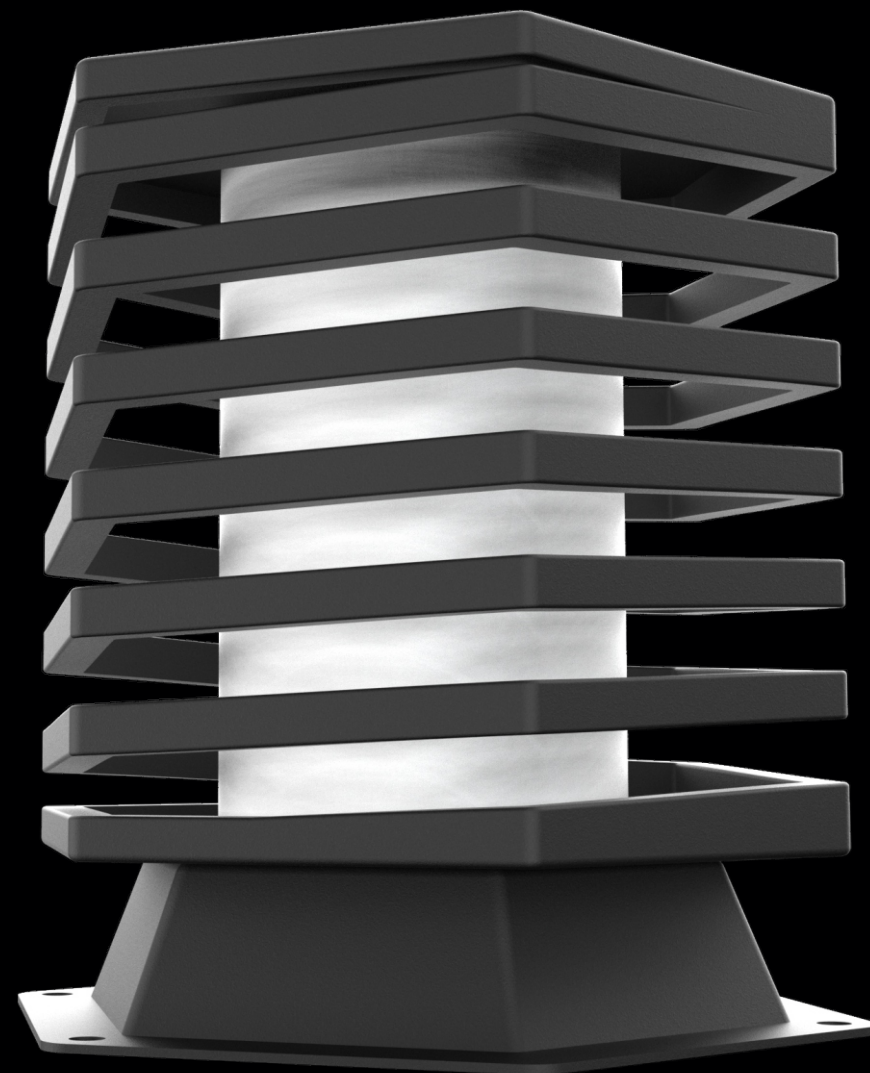

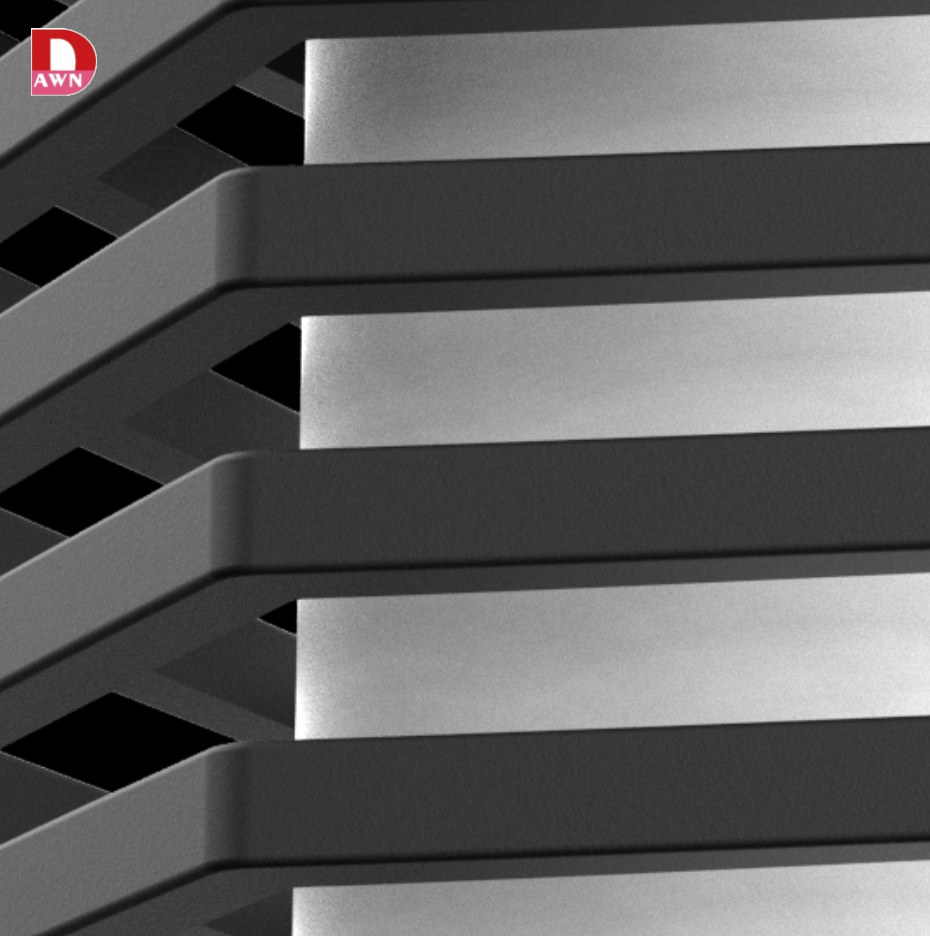


PRODUCT DETAILS

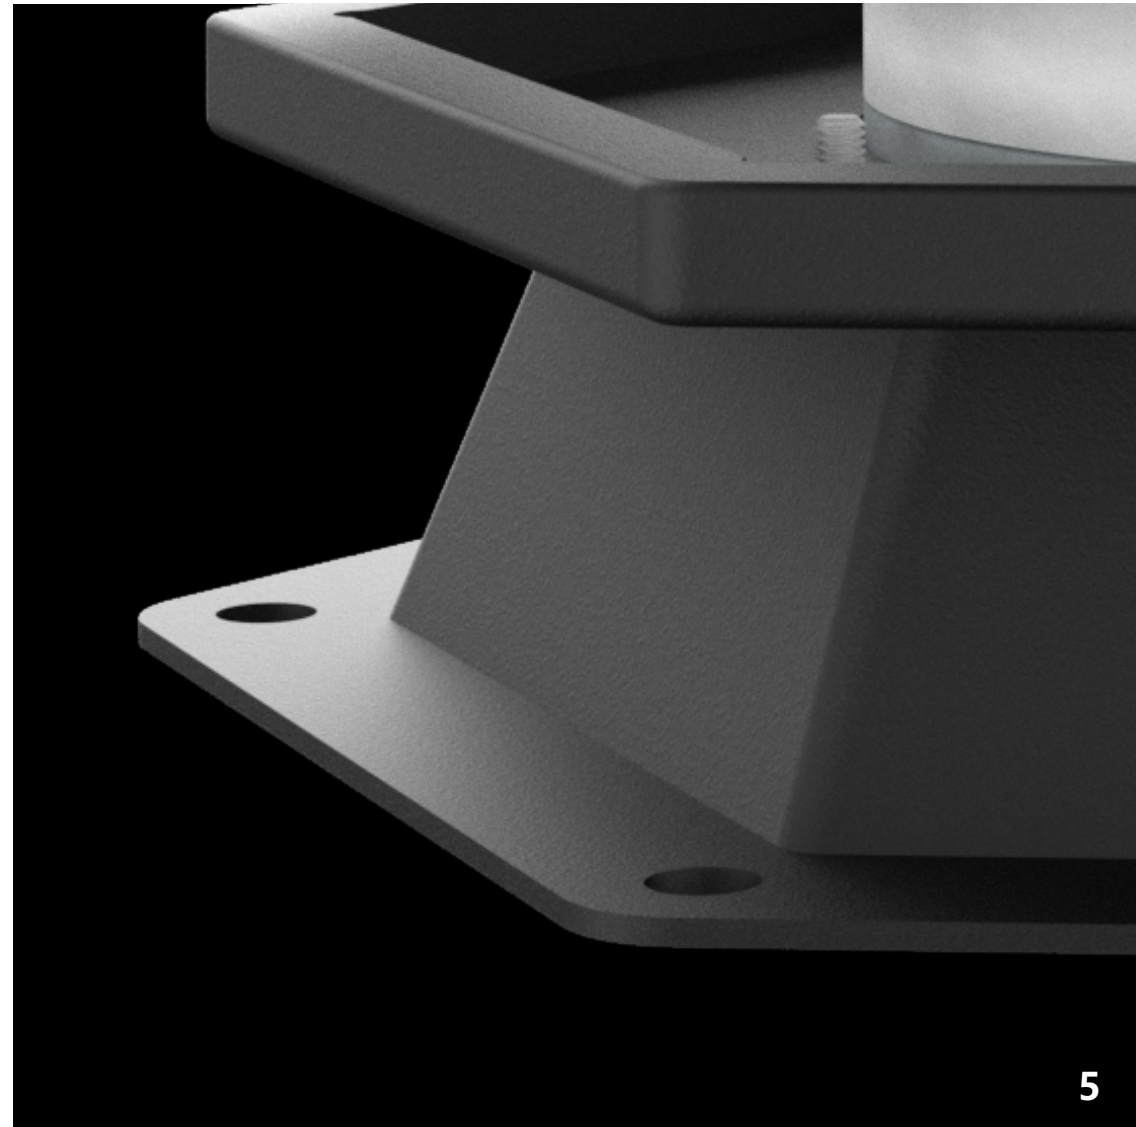

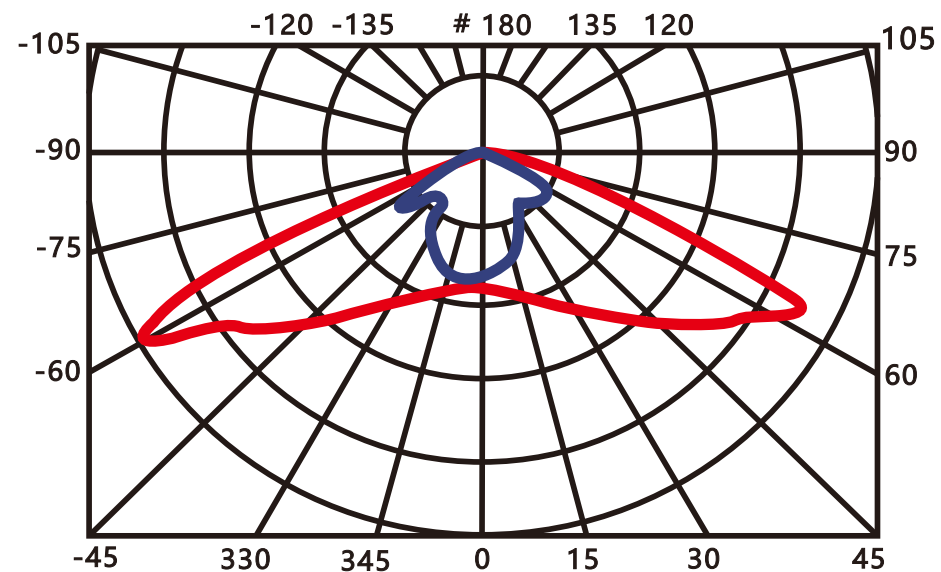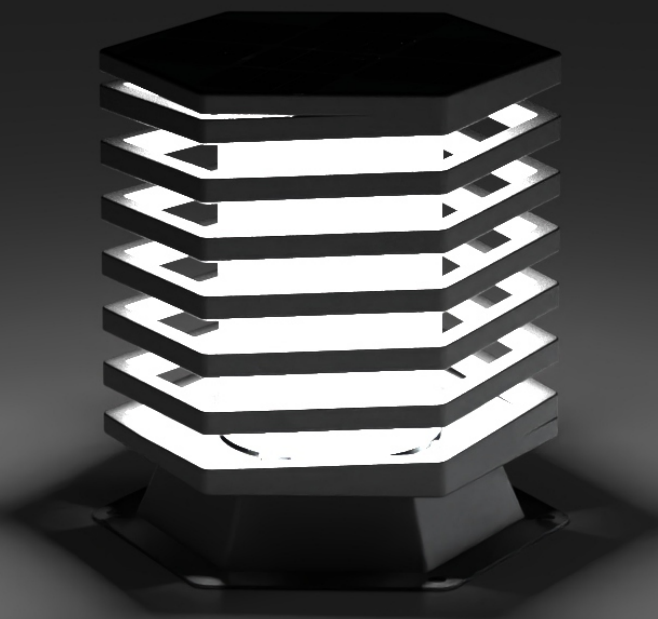


3000K

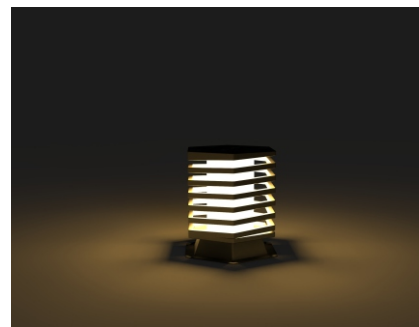




4000K



6500K




TECHNICAL DRAWINGS

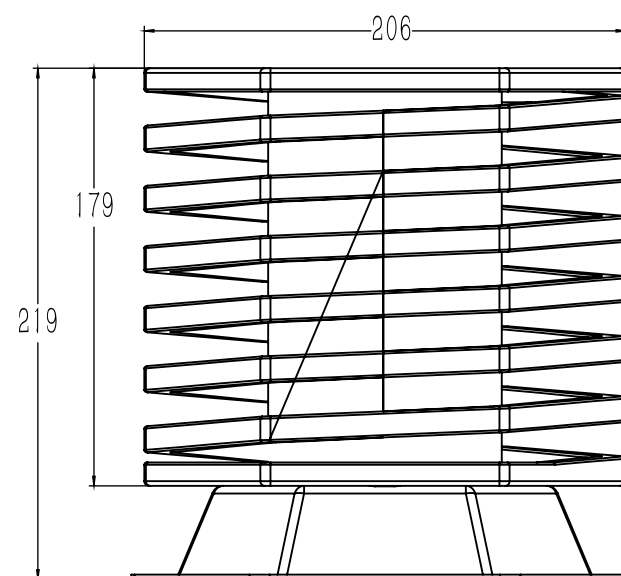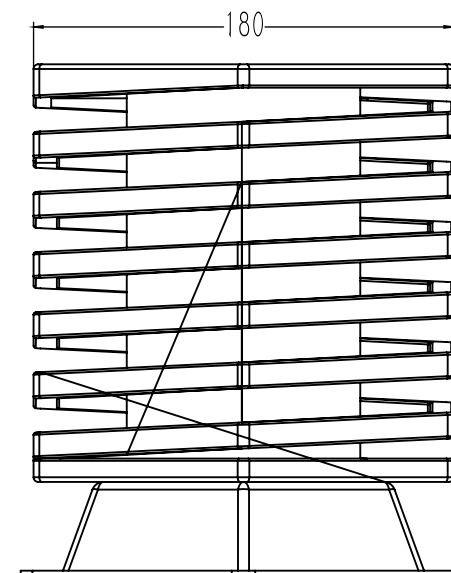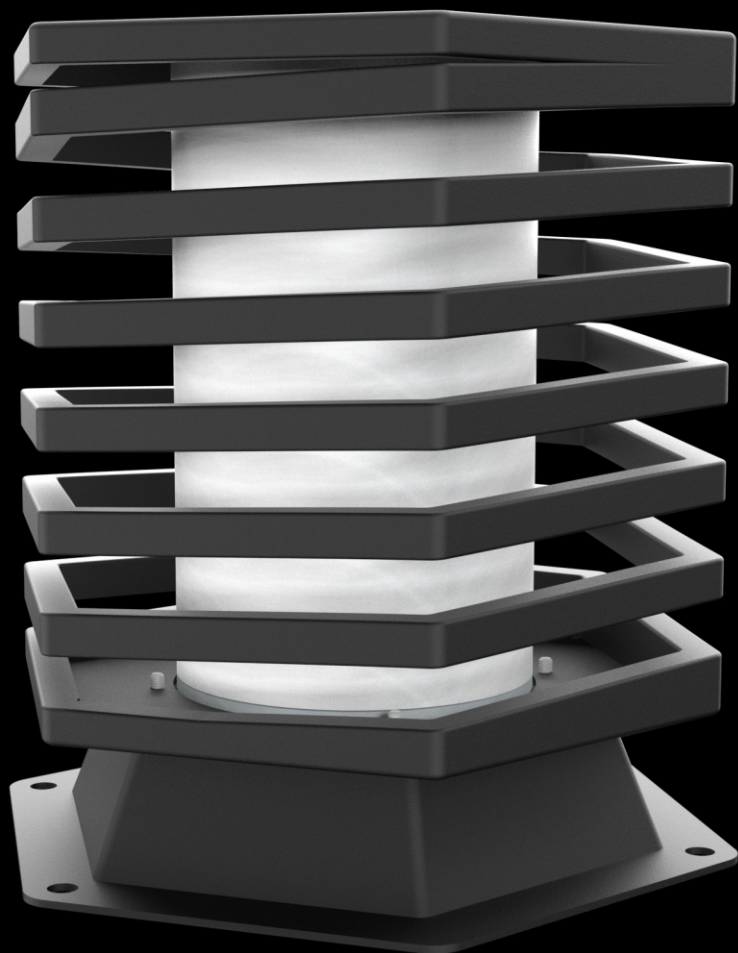

Product Paramenters

Luminaire	Rated Power	20W
	Light source	LED
	LED chip	Lumileds / Bridgelux
	Luminous efficiency	100lm/w
	Luminous flux.	500lm
	Color temperature	3500-6500K
	CRI.	>75
Pole	Beam angle	140 x 70 degree
	Pole shape	Triangle straight
	Material	Extruded aluminum profile 6061
PV module	Cross section size	150x150mm
	Photovoltaic type	Polycrystalline / monocrystallince
	Power	300W
	Other function	Replaceable
Battery system	Battery type	Lithium iron phosphate battery
	System voltage	AC 85-265V
	Battery capacity	48Ah

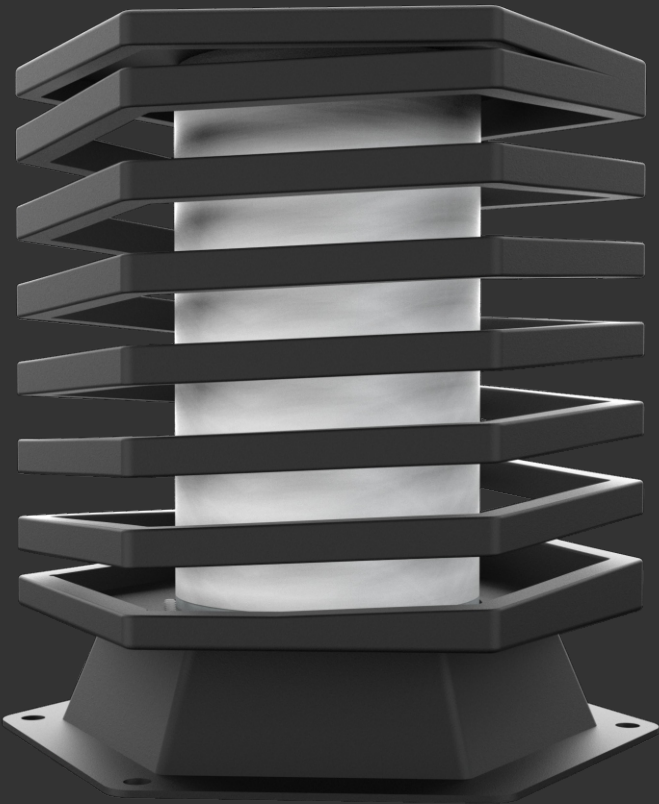

Shipment



Packaging



Truck loading



Goods receipt





ZHONGSHAN DAWN LIGHTING TECHNOLOGY CO.,LTD

Headquarters: Unit 3401-3402, 34/F Lihe Centre, NO.98 Tongxing Road, Guzhen,
Zhongshan, Guangdong, 546800, China.

Factory, No 34 Luosha Industry Avenue, Haizhou, Guzhen, Zhongshan,
Guangdong, 546800, China.

[Http://www.dawnlighting.net](http://www.dawnlighting.net) Email: info@dawnlighting.net